

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, SILVER PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 GASKET: SILICONE RUBBER

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~3 GHZ
- 3 VSWR : ≤ 1.15
- 4 PIM3: ≥ 160 DBC (2X43DBM)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT





| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 11/01/19 | J. QU |

D

C

B

A

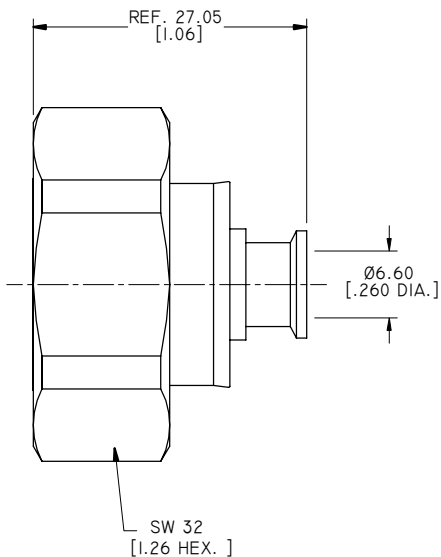

CABLE STRIPPING DIMENSIONS

D

C

B

A

| | | | |
|---|----------------|--|----------|
| DRAWN | X. B. YANG | DATE | 11/01/19 |
| CHECKED | W. YANG | DATE | 11/01/19 |
| APPROVED | J. QU | DATE | 11/01/19 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD | |
| .XX | ±0.13 [0.005"] | | |
| .X | ±0.20 [0.008"] | | |
| X | ±0.50 [0.019"] | | |
| .X° | ±1° | | |
| X° | ±2° | | |



| | | | |
|--|-------|---------------|------|
| TITLE | | | |
| 7/16 STRAIGHT MALE SOLDER/SOLDER FOR 1/4" SUPER FLEX CABLE | | | |
| VIEW | | PART NO. | |
| | | ANO 5611-2048 | |
| SIZE | SCALE | SHEET | REV. |
| A3 | 2:1 | 1/1 | A |

4

3

2

1