

MATERIAL & FINISH

- 1 BODY: BRASS, ALBALOY\AI; PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, SILVER PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 GASKTE: SILICONE RUBBER

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~7.5 GHZ
- 3 VSWR: 1.10 MAX. AT DC~3 GHZ
- 4 WITHSTANDING VOLTAGE: 2500 VRMS MIN.
- 5 INTERMODULATION(3RD ORDER): < -165 DBC(2X43 DBM) AT 0.4~3 GHZ

MECHANICAL DATA:

- 1 NET WEIGHT: 80G

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/12/12	J. QU
B	OUTLINE DRAWING CHANGED	10/20/17	J. QU
C	INTERMODULATION(3 RD ORDER) CHANGED TO < -165 DBC	07/07/21	J. QU

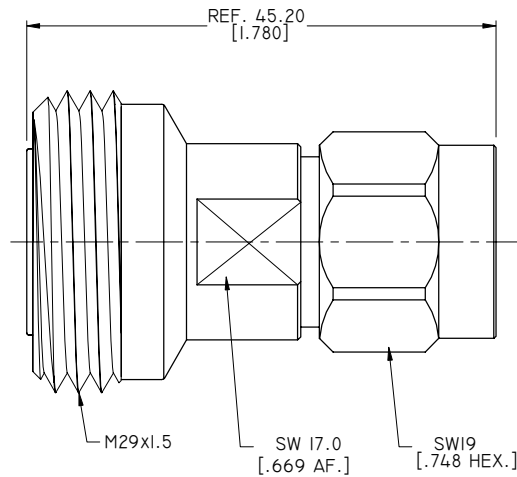

DRAWN	X. B. YANG	DATE	07/07/21	
CHECKED	W. YANG	DATE	07/07/21	
APPROVED	J. QU	DATE	07/07/21	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD</small>		
<small>.XX ±0.13 [.005"]</small> <small>.X ±0.20 [.008"]</small> <small>X ±0.50 [.019"]</small> <small>.X° ±1°</small> <small>X° ±2°</small>		TITLE ADAPTER, 7/16 FEMALE TO N MALE		
VIEW 		PART NO. ANO 562-511-II33		
SIZE	A3	SCALE	2:1	SHEET 1/1 REV. C