

MATERIAL & FINISH

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, SILVER PLATED
- 3 INSULATOR: PTFE

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(ROHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~7.5 GHZ
- 3 VSWR: 1.10 MAX. AT DC~3 GHZ
- 4 WITHSTANDING VOLTAGE: 2500 VRMS MIN.
- 5 INTERMODULATION(3RD ORDER): < -165 DBC(2X43 DBM) AT 0.4~3 GHZ

MECHANICAL DATA:

- 1 NET WEIGHT: 67G

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/16/14	J. QU
B	OUTLINE DRAWING CHANGED	10/20/17	J. QU
C	INTERMODULATION(3 RD ORDER) CHANGED TO < -165 DBC	07/07/21	J. QU

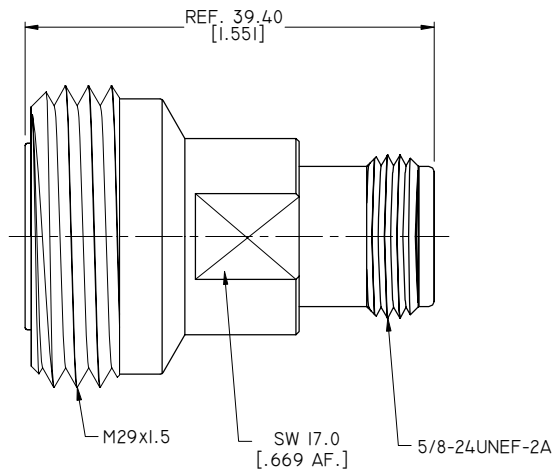

DRAWN	X. B. YANG	DATE	07/07/21															
CHECKED	W. YANG	DATE	07/07/21															
APPROVED	J. QU	DATE	07/07/21															
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD</small>		TITLE														
<table border="0"> <tr> <td>.XX</td> <td>±0.13 [.005"]</td> </tr> <tr> <td>.X</td> <td>±0.20 [.008"]</td> </tr> <tr> <td>X</td> <td>±0.50 [.019"]</td> </tr> <tr> <td>.X°</td> <td>±1°</td> </tr> <tr> <td>X°</td> <td>±2°</td> </tr> </table>		.XX	±0.13 [.005"]	.X	±0.20 [.008"]	X	±0.50 [.019"]	.X°	±1°	X°	±2°	<table border="0"> <tr> <td>VIEW</td> <td>PART NO.</td> </tr> <tr> <td></td> <td>ANO 562-512-1230</td> </tr> </table>		VIEW	PART NO.		ANO 562-512-1230	TITLE
.XX	±0.13 [.005"]																	
.X	±0.20 [.008"]																	
X	±0.50 [.019"]																	
.X°	±1°																	
X°	±2°																	
VIEW	PART NO.																	
	ANO 562-512-1230																	
		SIZE	SCALE	SHEET	REV.													
		A3	2:1	1/1	C													