

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, NICKEL PLATED
- 5 LOGASKET: SILICONE RUBBER

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-300 MHz
- 3 DIELECTRIC WITHSTANDING VOLTAGE: 1500 V RMS
- 4 INSULATION RESISTANCE: 5000 MΩ MIN.


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT/VAO;

MECHANICAL DATA:

- 1 CYCLES: 500 MIN.

| REVISIONS | | | |
|-----------|--|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 02/18/24 | J. Q |
| B | PRT NO. ANO 571-311-1660 WAS ANO 751-311-1660 | 03/15/24 | J. Q |

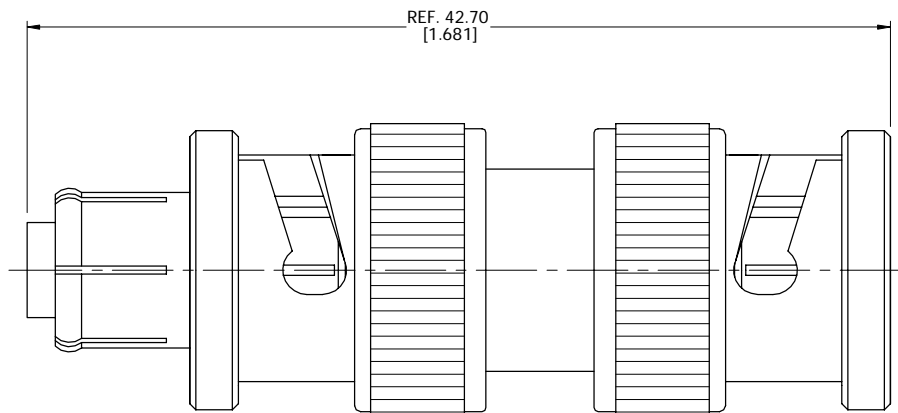

| | | | | | |
|---|--------------|--|----------|----------|-------------------------------|
| DRAWN | X. Y | DATE | 03/15/24 | | |
| CHECKED | W. Y | DATE | 03/15/24 | | |
| APPROVED | J. Q | DATE | 03/15/24 | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD | | TITLE | ADAPTER, SHV MALE TO BNC MALE |
| XX | ±0.13 [005"] | VIEW | | PART NO. | ANO 571-311-1660 |
| X | ±0.20 [008"] | SIZE | A3 | SCALE | 4:1 |
| X | ±0.50 [019"] | SHEET | 1/1 | REV. | B |
| X° | ±1° | | | | |
| X" | ±2° | | | | |

4

3

2

1