

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, NICKEL PLATED
- 5 LOGASKET: SILICONE RUBBER

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-300 MHz
- 3 DIELECTRIC WITHSTANDING VOLTAGE: 1500 V RMS
- 4 INSULATION RESISTANCE: 5000 MΩ MIN.


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

MECHANICAL DATA:

- 1 CYCLES: 500 MIN.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/18/24	J. Q
B	34.00 [1.339] WAS 38.90 [1.531]	03/12/24	J. Q
C	PRT NO. ANO 572-311-1661 WAS ANO 752-311-1661	03/15/24	J. Q

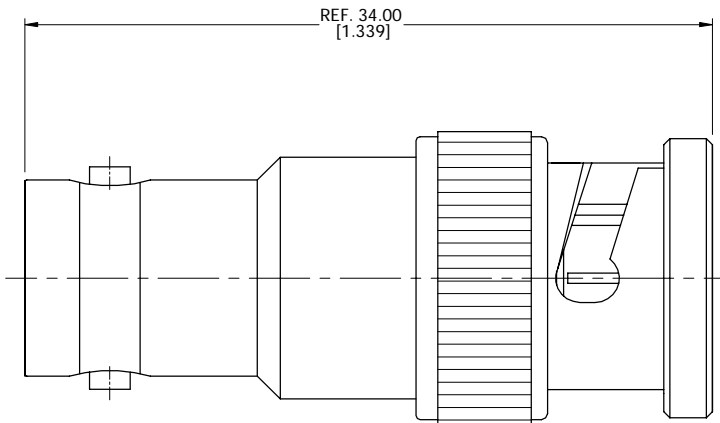

DRAWN	X. Y	DATE	03/15/24
CHECKED	W. Y	DATE	03/15/24
APPROVED	J. Q	DATE	03/15/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
XX	±0.13 [005"]		
X	±0.20 [008"]		
X	±0.50 [019"]		
X°	±1°		
X"	±2°		



TITLE			
ADAPTER, SHV FEMALE TO BNC MALE			
VIEW		PART NO.	
		ANO 572-311-1661	
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	C

4

3

2

1