

4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/01/23	J. Q

MATERIAL & FINISH:


- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATED
- 3 INSULATOR: PEI
- 4 COUPLING NUT: STAINLESS STEEL, PASSIVATED

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-67 GHz
- 3 VSWR: 1.30 MAX.
- 4 AVERAGE POWER: MAXIMUM POWER 2 WATTS AVERAGE TO 25°C AMBIENT TEMPERATURE, DERATED LINEARLY TO 0.2W @ 125°C
- 5 PEAK POWER: MAXIMUM POWER 50 W
- 6 ATTENUATOR ACCURACY: ATTENUATION VALUE 80±2 dB

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+125 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

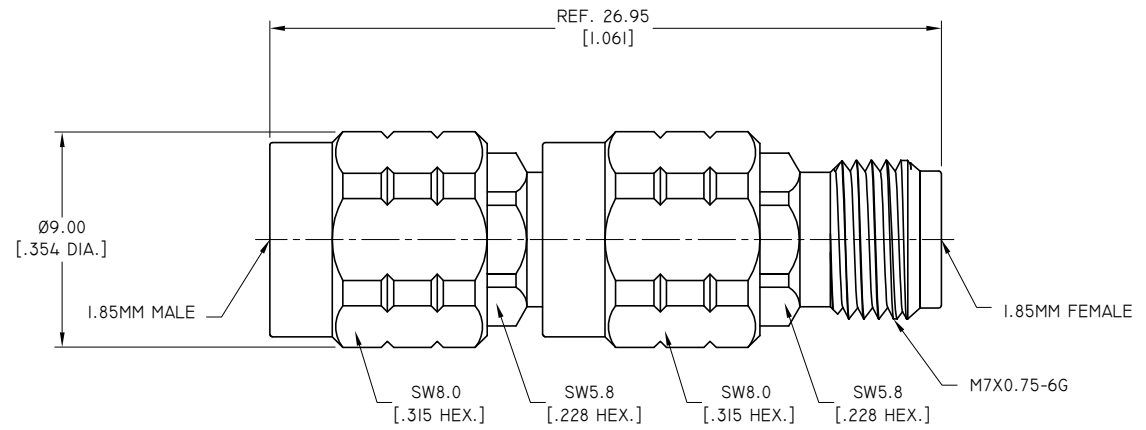

DRAWN	P. C	DATE	08/01/23
CHECKED	X. Y	DATE	08/01/23
APPROVED	J. Q	DATE	08/01/23
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.25 [.010"]		
X	±0.50 [.019"]		
X°	±1°		
X"	±2°		

TITLE
ATTENUATOR 1.85MM MALE TO 1.85MM FEMALE, 2W, DC-67GHz, ATTENUATION VALUE 80 dB

VIEW

PART NO. ANO 62-0203-80

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A

4 3 2 1