

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/18/20	J QU

MATERIAL & FINISH:



1. BODY: STAINLESS STEEL, PASSIVATED
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3. COUPLING NUT: STAINLESS STEEL, PASSIVATED
4. INSULATOR: PEI

ELECTRICAL DATA:

1. IMPEDANCE: 50 OHMS
2. FREQUENCY RANGE: DC-67 GHz
3. VSWR: 1.35 MAX.

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -40 °C~+125 °C
2. 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3. 1999/45/EC(REACH): COMPLIANT

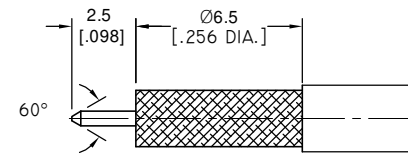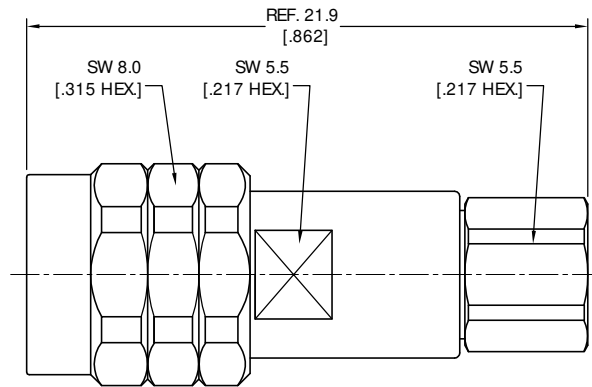

CABLE STRIPPING DIMENSIONS

DRAWN	W. YANG	DATE	05/19/20
CHECKED	L. YANG	DATE	05/19/20
APPROVED	J QU	DATE	05/19/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
1.85MM STRAIGHT MALE SOLDER FOR UT-085/UT-085C-FORM CABLE			
VIEW	PART NO.		
	ANO 6211-2038		
SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	A

4

3

2

1