MATERIAL & FINISH:
1 BODY: STAINLESS STEEL, PASSIVATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 COUPLING NUT: STAINLESS STEEL, PASSIVATED
4 INSULATOR: PEI

ELECTRICAL DATA:
1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~67 GHz
3 VSWR: 1.25 MAX.

ENVIRONMENTAL DATA:
1 TEMPERATURE RANGE: -55℃~+165℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/09/20	J QU

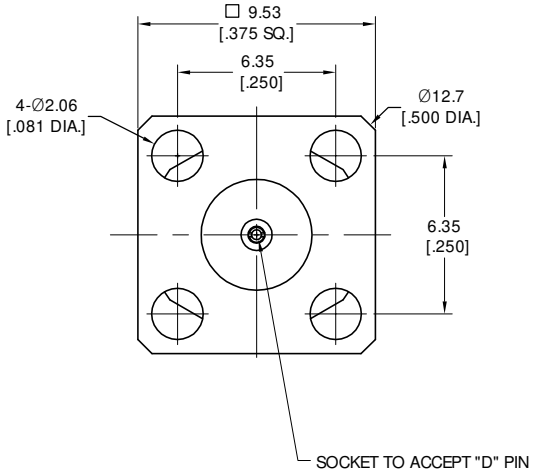

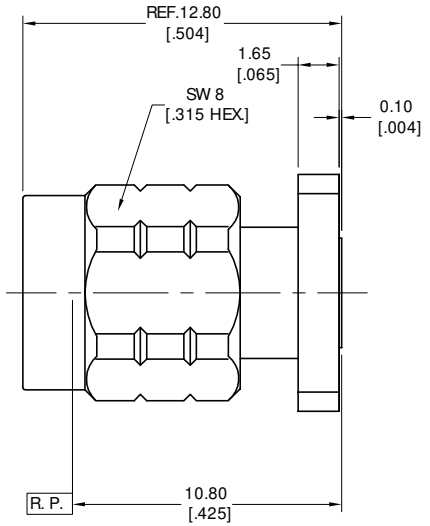

P/N	D	PIN DEPTH MAX.
ANO 6211-3044-1	Ø0.23 [.009 DIA.]	1.65 [.065]
ANO 6211-3044-2	Ø0.30 [.012 DIA.]	1.65 [.065]

DRAWN	P. CHEN	DATE 11/09/20
CHECKED	X. B. YANG	DATE 11/09/20
APPROVED	J QU	DATE 11/09/20

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD

ANOISON

TITLE
1.85MM STRAIGHT MALE 4 HOLE .375" SQ FLANGE MOUNT, FIELD REPLACEABLE

VIEW

PART NO.
ANO 6211-3044

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A