

4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/01/21	J. QU

1.0 MATERIAL & FINISH

- 1.1 BODY: STAINLESS STEEL, GOLD PLATED
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 1.3 INSULATOR: PEI

3.0 ELECTRICAL DATA:



- 3.1 IMPEDANCE: 50 OHMS
- 3.2 FREQUENCY RANGE: DC-67GHZ
- 3.3 VSWR: 1.40 MAX.

2.0 ENVIRONMENTAL DATA:

- 2.1 TEMPERATURE RANGE: -55°C~+165°C
- 2.2 2011/65/EU (RoHS): COMPLIANT

4.0 MECHANICAL DATA:

- 4.1 MECHANICAL DURABILITY: 500 CYCLES MIN.
- 4.2 CENTER CONTACT: CAPTIVATED
- 4.3 OUTER CONTACT: SOLDERED

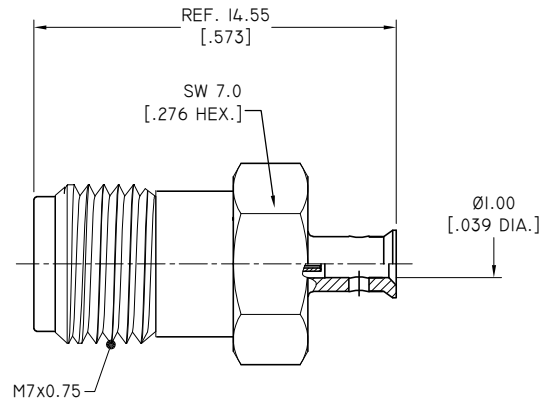

CABLE STRIPPING DIMENSIONS

D
C
B
A

D
C
B
A

DRAWN	W. YANG	DATE	11/01/21
CHECKED	X. B. YANG	DATE	11/01/21
APPROVED	J. QU	DATE	11/01/21
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		

TITLE 1.85MM STRAIGHT FEMALE SOLDER FOR .034 CABLE, SOLDER DIRECT			
VIEW		PART NO. ANO 6212-2052	
		SIZE A3	SCALE 5:1
		SHEET 1/1	REV. A

4 3 2 1