MATERIAL & FINISH
1 BODY: STAINLESS STELL, PASSIVATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: PEI

ENVIRONMENTAL DATA:
1 TEMPERATURE RANGE: -55℃~+125℃
2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:
1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~65 GHz

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/09/20	J. QU
B	LENGTH CHANGED	02/22/22	J. QU

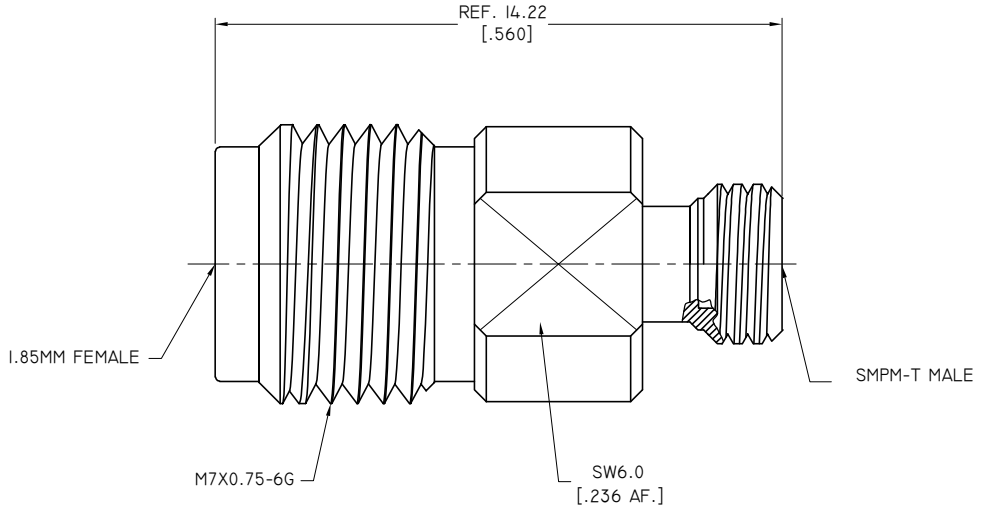

PART NO.	INTERFACE
ANO 622-941-1525-1	FULL DETENT
ANO 622-941-1525-2	SMOOTH BORE

DRAWN	W. YANG	DATE 02/22/22
CHECKED	X. B. YANG	DATE
APPROVED	J. QU	DATE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD

ANOISON

TITLE
ADAPTER, 1.85MM FEMALE TO SMPM-T MALE

VIEW

PART NO. ANO 622-941-1525

SIZE	SCALE	SHEET	REV.
A3	8:1	1/1	B