

MATERIAL & FINISH

- 1 BODY: STAINLESS STEEL, GOLD PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 COUPLING NUT: STAINLESS STEEL, GOLD PLATED
- 4 INSULATOR: PTFE
- 5 RETAINING RING: BERYLLIUM COPPER ALLOY, UNPLATED
- 6 GASKET: SILICONE RUBBER



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.20 MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (ROHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/10/25	J. Q

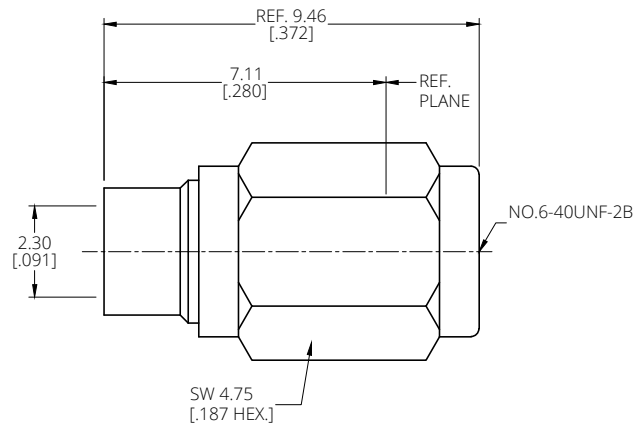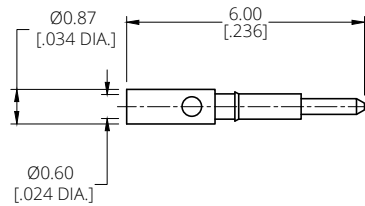

DRAWN	Y. H	DATE	03/10/25
CHECKED	L. Y	DATE	03/10/25
APPROVED	J. Q	DATE	03/10/25
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
X°	±1°		
X°	±2°		



TITLE			
OSMM STRAIGHT MALE SOLDER FOR .086 CABLE			
VIEW		PART NO.	
		ANO 6711-2002	
SIZE	SCALE	SHEET	REV.
A3	8:1	1/1	A