

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/17/17	J. QU

MATERIAL & FINISH

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 4 INSULATOR: PEI
- 5 RESISTANCE: BERYLLIUM OXIDE

ELECTRICAL DATA:



- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~50 GHZ
- 3 VSWR: 1.25 MAX. DC~40 GHZ
1.30 MAX. AT 40~50 GHZ
- 4 AVERAGE POWER: 1 WATTS AVERAGE TO 25°C AMBIENT TEMPERATUE, DERATED LINEARLY TO 0.1 W @ 125°C
- 5 PEAK POWER: 0.1 KW (5µS PLUSE WIDTH WITH 0.5% DUTY CYCLE)

ENVIRONMENTAL DATA:

- 1 OPERATING TEMPERATURE RANGE: -55°C~+125°C
- 2 STORAGE TEMPERATURE RANGE: -55°C~+125°C
- 3 2011/65/EU (RoHS): COMPLIANT

MECHANICAL DATA:

MATING CYCLES: 500 MIN.

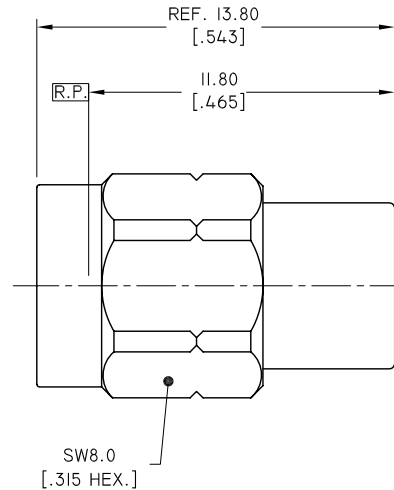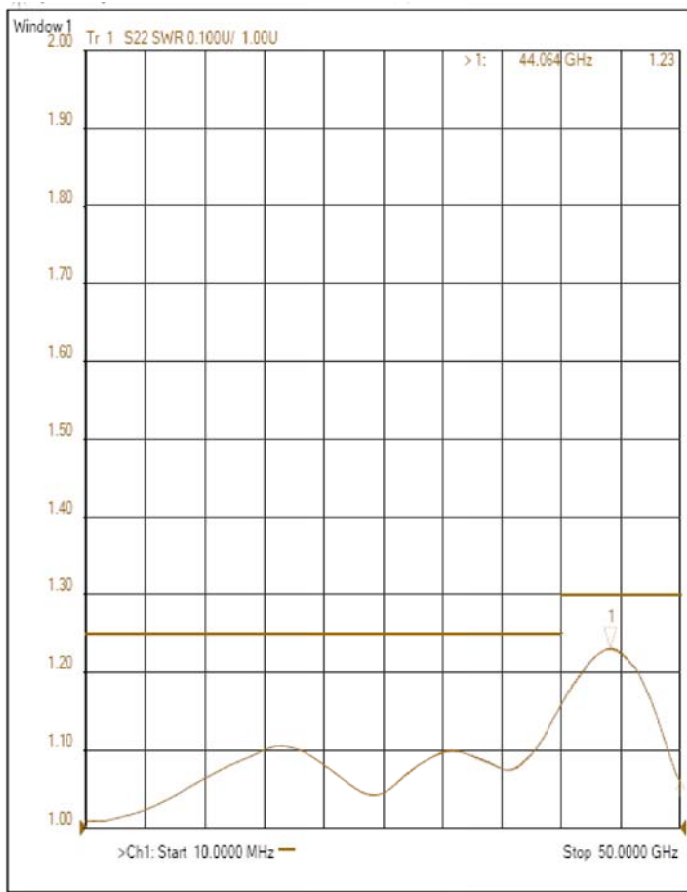

DRAWN	P. CHEN	DATE	10/17/17	
CHECKED	X. B. YANG	DATE	10/17/17	
APPROVED	J. QU	DATE	10/17/17	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD</small>		TITLE COAXIAL TERMINATION 2.4MM MALE, 1.0 WATTS, DC~50GHZ
<small>.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°</small>		VIEW 	PART NO. ANO 722-103	SIZE A3 SCALE 5:1 SHEET 1/1 REV. A

4

3

2

1