

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
E	VSWR CHANGED	11/21/13	J. QU
F	1. ANO 726-101-I REMOVED 2. ANO 726-101 BODY FINISH CHANGED TO ALBALOY PLATED	09/19/16	J. QU

MATERIAL & FINISH:


- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 UNLOCK SLEEVE: BRASS, ALBALOY PLATED
- 4 INSULATOR: PTFE & PEI
- 5 RESISTANCE: BERYLLIUM OXIDE
- 6 GASKET: SILICONE RUBBER

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~18 GHZ
- 3 VSWR: 1.15 MAX. AT DC~6 GHZ
1.25 MAX. AT 6~18 GHZ
- 4 AVERAGE POWER: 1 WATT AVERAGE TO 25°C AMBIENT TEMPERATRUE, DERATED LINEARLY TO 0.2 W @ 125°C
- 5 PEAK POWER: 100 W (5μS PLUSE WIDTH WITH 1% DUTY CYCLE)

ENVIRONMENTAL DATA:

- 1 OPERATING TEMPERATURE RANGE: -55°C~+125°C
- 2 STORAGE TEMPERATURE RANGE: -55°C~+125°C
- 3 2011/65/EU (RoHS): COMPLIANT

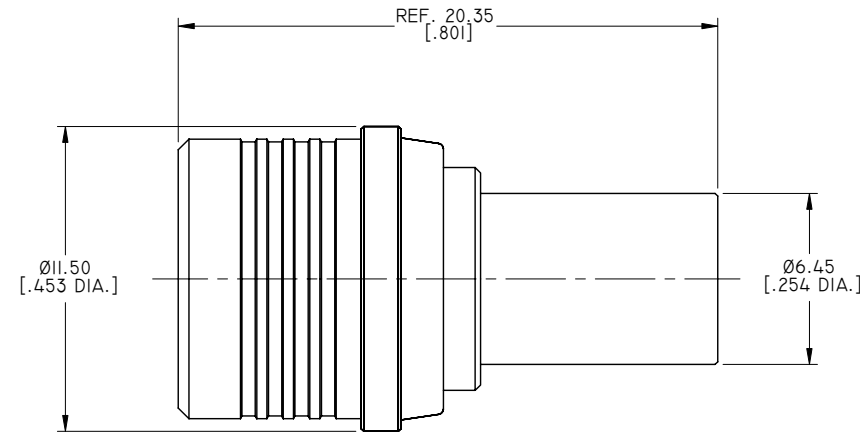

NOTES:

- 1 ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
- 2 CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY.
- 3 THIS PRODUCT CONTAINS BERYLLIA CERAMIC INSIDE, WHICH IS POTENTIALLY HARMFUL TO THE ENVIRONMENT. DISPOSE OF CORRECTLY.

DRAWN X. B. YANG	DATE 09/19/16	
CHECKED L. YANG	DATE 09/19/16	
APPROVED J. QU	DATE 09/19/16	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		TITLE COAXIAL TERMINATION QMA MALE 1 WATT, DC~18GHZ
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD		PART NO. ANO 726-101
VIEW 		SIZE A3 SCALE 5:1 SHEET 1/1 REV. F

4

3

2

1