

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 GASKET: SILICONE RUBBER
- 5 RADIATOR: ALUMINIUM, BLACK

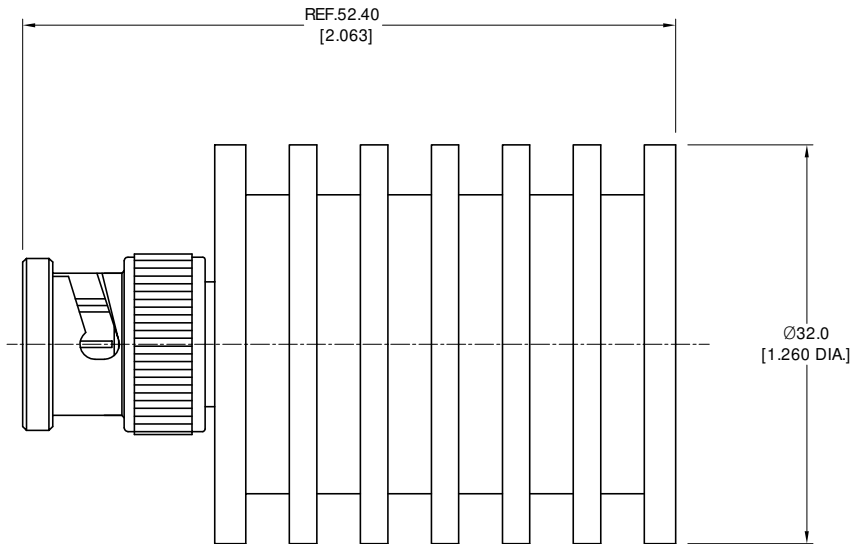
ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~2 GHz
- 3 VSWR: 1.20 MAX.
- 4 AVERAGE POWER: 10 WATT AVERAGE TO 25°C AMBIENT TEMPERATURE, DERATED LINEARLY TO 1 W @ 125°C
- 5 PEAK POWER: 0.5 KW (5µS PULSE WIDTH WITH 2% DUTY CYCLE)


ENVIRONMENTAL DATA:

- 1 OPERATING TEMPERATURE RANGE: -55 °C ~ +125 °C
- 2 STORAGE TEMPERATURE RANGE: -55 °C ~ +125 °C
- 3 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 4 1999/45/EC(REACH): COMPLIANT



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/22/21	J QU



DRAWN	P. CHEN	DATE	01/22/21
CHECKED	X. B. YANG	DATE	01/22/21
APPROVED	J QU	DATE	01/22/21
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD	
	XX	±0.13	[.005"]
	.X	±0.20	[.008"]
	X	±0.50	[.019"]
	.X°	±1°	
	X°	±2°	



TITLE
COAXIAL TERMINATION
BNC MALE, 10 WATTS, DC~2GHZ

VIEW  

PART NO.
ANO 731-104

SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A
-------------------	-----------------------	---------------------	------------------

4

3

2

1