MATERIAL & FINISH

1 BODY: BRASS, GOLD PLATED
2 OUT CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 CENTER CONTACT: BRASS, GOLD PLATED
4 INSULATOR: PTFE

ELECTRICAL DATA:

1 IMPEDANCE: 50 OHMS
2 FREQUENCY RANGE: DC~18 GHz

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -65℃~+165℃
2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/22/17	J. QU
B	FASTENING SLEEVE STRUCTURE CHANGED	04/07/17	J. QU

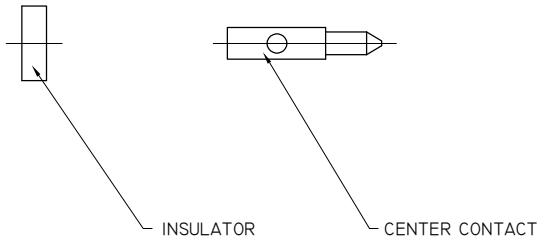

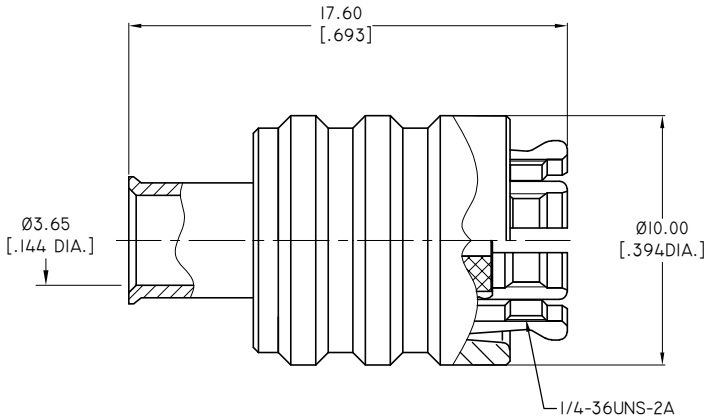



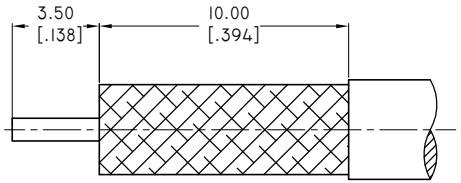

CABLE STRIPPING DIMENSIONS

DRAWN	W. YANG	DATE 04/07/17
CHECKED	L. YANG	DATE 04/07/17
APPROVED	J. QU	DATE 04/07/17

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD

ANOISON

TITLE: SMA QUICK LOCKING STRAIGHT MALE SOLDER FOR .141 CABLE

VIEW

PART NO. ANO 7311-2002

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	B