

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, SILVER PLATED
- 3 OUTERCONTACT: BERYLLIUM COPPER ALLOY, SILVER PLATED
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 INSULATOR: PTFE & PEI
- 6 GASKET: SILICONE RUBBER

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-20 GHz
- 3 VSWR: 1.30 MAX.
- 4 DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS
- 5 INSULATION RESISTANCE: 5000 MΩ

MECHANICAL DATA:

- 1 MATING: 100 CYCLES MIN.
- 2 WEIGHTH: 12 g
- 3 RECOMMENDED TORQUE: 1.5 NM (M10(NEX10) SIDE)

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/26/23	J. Q

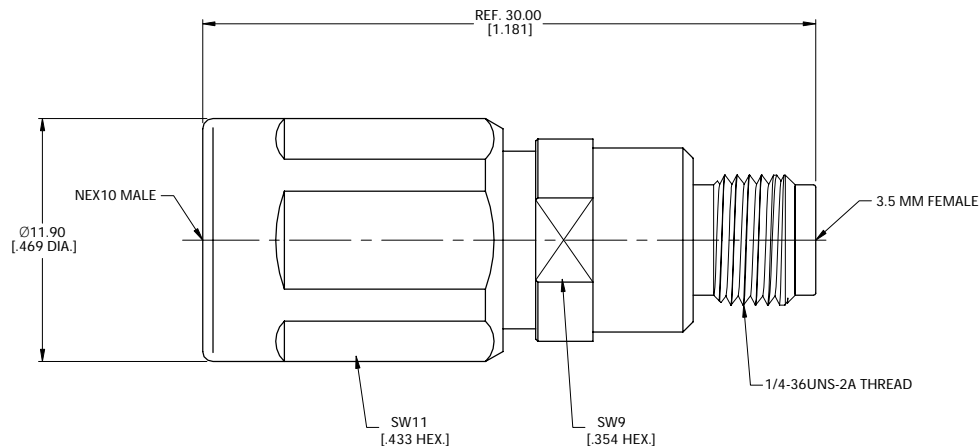

DRAWN	X. Y	DATE	10/26/23
CHECKED	W. Y	DATE	10/26/23
APPROVED	J. Q	DATE	10/26/23
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
X°	±1°		
X"	±2°		



TITLE
ADAPTER, M10(NEX10) MALE TO 3.5MM FEMALE

VIEW	PART NO. ANO 741-252-1654		
	SIZE A3	SCALE 5:1	SHEET 1/1
			REV. A

4

3

2

1