

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/13/17	J. QU
B	DRAWING FORMAT CHANGED	05/25/18	J. QU

MATERIAL & FINISH:


- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 5 GASKET: MVQ (SILICONE RUBBER)
- 6 RETAINING RING: PHOSPHOR BRONZE, UNPLATED
- 7 RESISTANCE: BERYLLIUM OXIDE

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.15 MAX. AT DC~11 GHz
1.25 MAX. AT 11~18 GHz
- 4 AVERAGE POWER: 2 W AVERAGE TO 25°C AMBIENT TEMPERATRUE, DERATED LINEARLY TO 0.2 W @ 125°C
- 5 PEAK POWER: 500 W (5μs PULSE WIDTH WITH 0.8% DUTY CYCLE)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

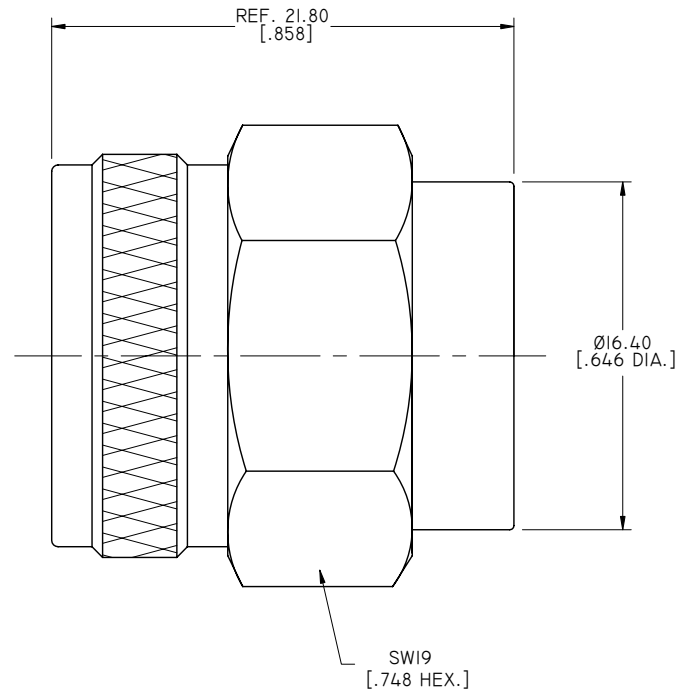

NOTES:

- 1 ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
- 2 CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY.

DRAWN	X. B. YANG	DATE	05/25/18
CHECKED	W. YANG	DATE	05/25/18
APPROVED	J. QU	DATE	05/25/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
COAXIAL TERMINATION, N MALE 2, WATTS, DC~18GHZ			
VIEW		PART NO.	
		ANO 75I-10I	
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	B

4

3

2

1