


DESCRIPTION	MATERIAL	FINISH
Center Contact	Phosphor bronze	Silver
Body	Brass	Albaloy
Coupling Nut	Brass	Albaloy
Radiator	Aluminium	Black
Gasket	MVQ(Silicone Rubber)	———
Insulator	PTFE	———
Resistance	Beryllium Oxide	———

Technical Data

1. Impedance: 50 Ohms
2. Frequency Range: DC to 6GHz
3. VSWR: 1.15 Max. at DC to 3GHz  
1.20 Max. at 3 to 6GHz
4. Operating Temp. : -55°C to +125°C
5. Average Power: 25 Watts
6. Peak Power: 3000 Watts

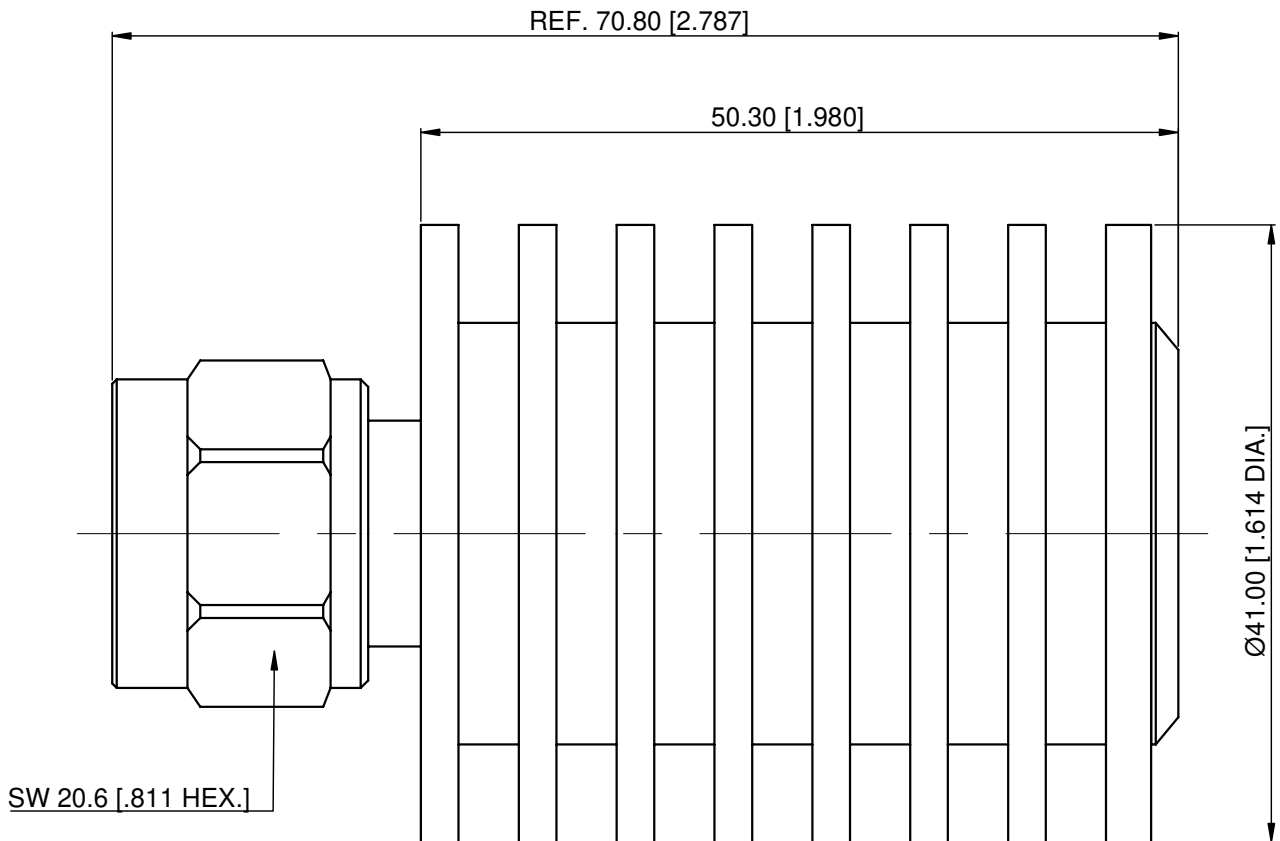

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY
4. THIS PRODUCT CONTAINS BERYLLIA CERAMIC INSIDE, WHICH IS POTENTIALLY HARMFUL TO THE ENVIRONMENT. DISPOSE OF CORRECTLY

RoHS Compliant

				Drawn: L. Yang 10/12/12	Title: <b>Coaxial Termination, N Male 25 Watts, DC~6GHz</b>			
				Checked: X. B. Yang 10/12/12				
Description				Approved: J. Qu 10/12/12				
				Unless otherwise specified dimensions are in millimeters, dimensions in [ ] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°				
				View:		Part No: <b>ANO 751-106</b>		
						Size: A4	Scale: 2:1	Sheet: 1/1