

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 GASKET: SILCONE RUBBER
- 6 RETAINING RING: PHOSPHOR BRONZE, UNPLATED
- 7 RESISTANCE: ALUMINIUM OXIDE


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: 1.10 MAX. AT DC~3 GHZ
1.15 MAX. AT 3~6 GHZ
- 4 AVERAGE POWER: 1 W AVERAGE POWER UP TO 85°C AMBIENT TEMPERATRUE, LINEARLY DERATED TO 0 W @ 115°C AMBIENT TEMPERATRUE
- 5 PEAK POWER: 100 W (5μS PULSE WIDTH WITH 1% DUTY CYCLE)

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/30/19	J. QU

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

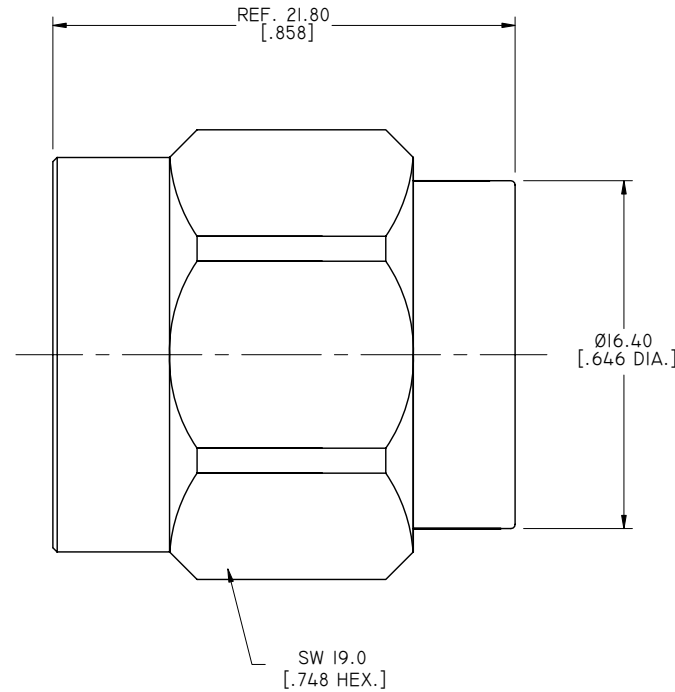

NOTES:

- 1 ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
- 2 CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY.

DRAWN	X. B. YANG	DATE	04/30/19
CHECKED	W. YANG	DATE	04/30/19
APPROVED	J. QU	DATE	04/30/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
COAXIAL TERMINATION, N MALE, 1 WATT, DC~6GHZ			
VIEW		PART NO.	
		ANO 751-I33	
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	A

4

3

2

1