

4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/23	J. Q

MATERIAL & FINISH:


- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 GASKET: SILCONE RUBBER
- 6 RETAINING RING: PHOSPHOR BRONZE, UNPLATED
- 7 RESISTOR: ALUMINIUM OXIDE

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHz
- 3 VSWR: 1.15 MAX.
- 4 AVERAGE POWER: 1 WATTS AVERAGE TO 25°C AMBIENT TEMPERATRUE, DERATED LINEARLY TO 0.5 W @ 125°C
- 5 PEAK POWER: 500 W (5μS PLUSE WIDTH WITH 0.4% DUTY CYCLE)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

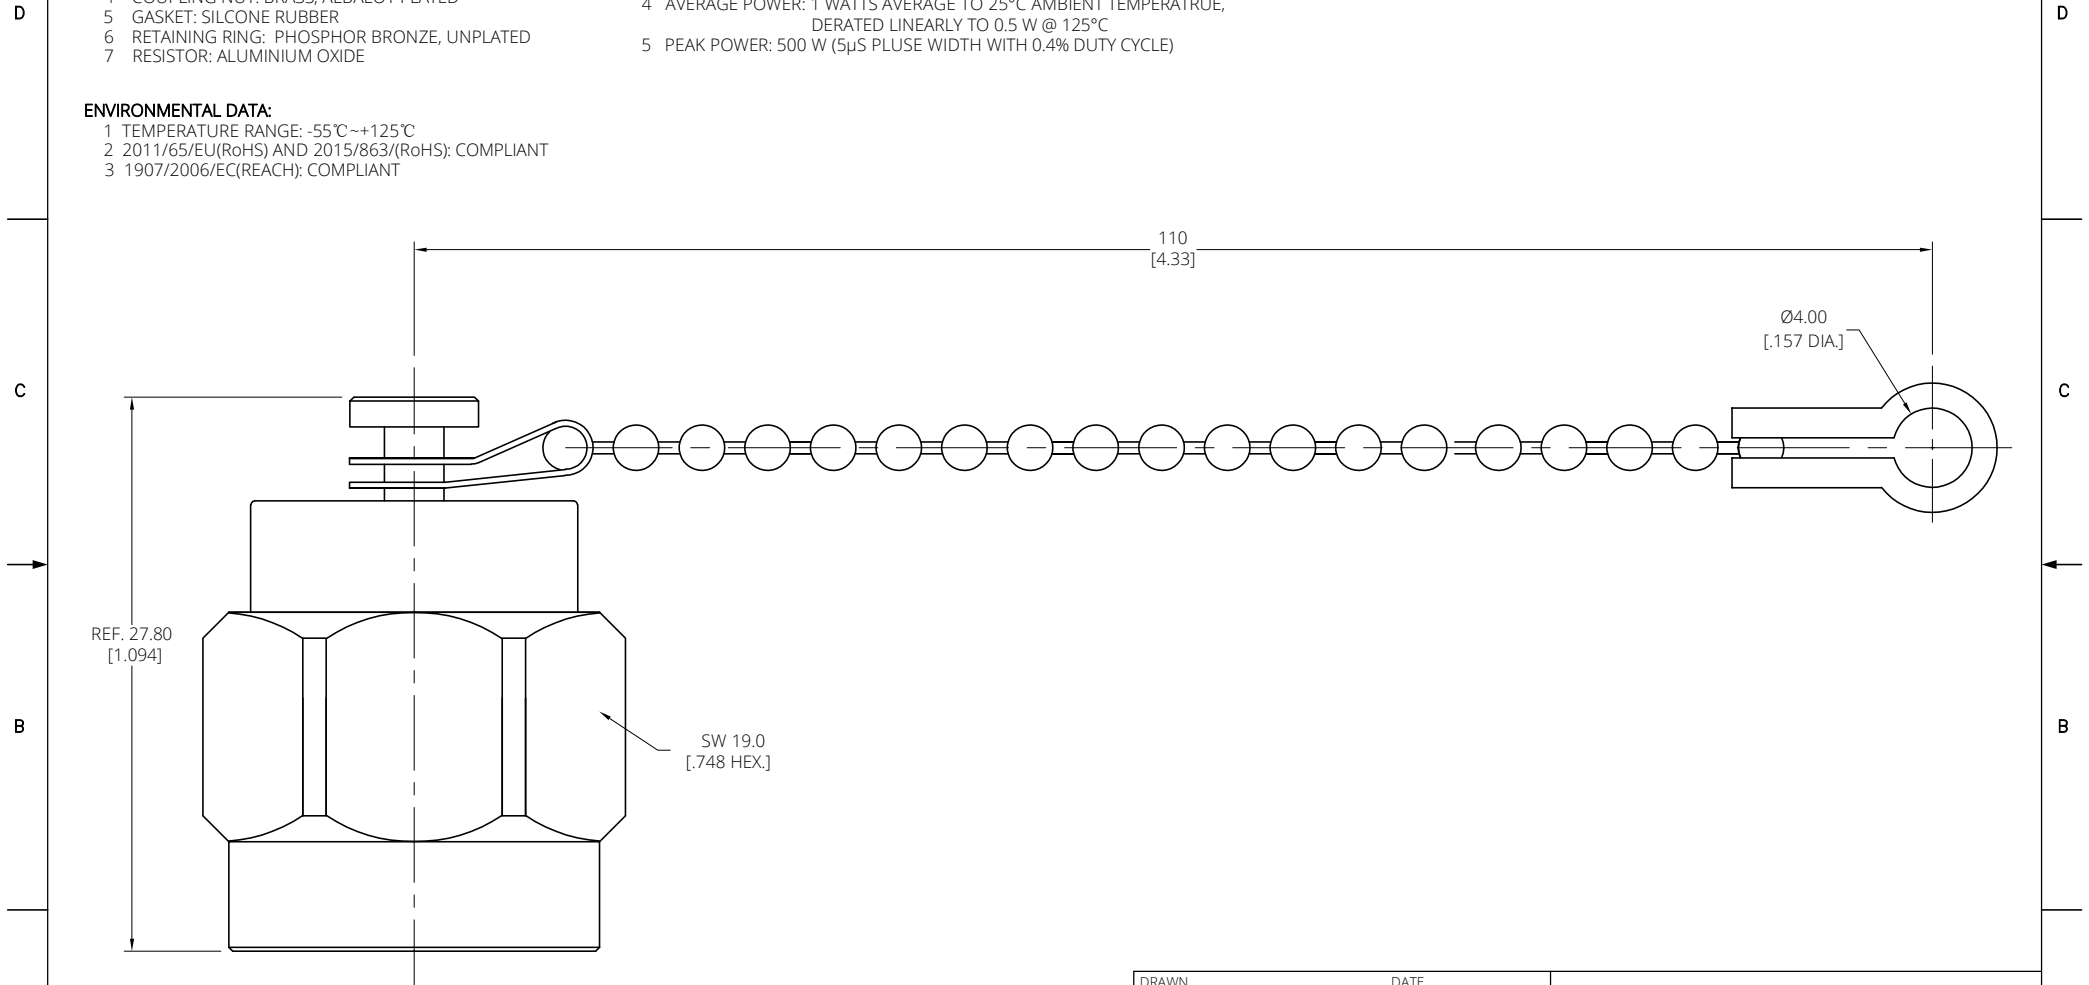

REF. 27.80
[1.094]

SW 19.0
[.748 HEX.]

DRAWN	W. Y	DATE	05/10/23
CHECKED	X. Y	DATE	05/10/23
APPROVED	J. Q	DATE	05/10/23

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

XX	±0.13 [0.005"]
X	±0.20 [0.008"]
x	±0.50 [0.019"]
X°	±1°
x°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD



TITLE
COAXIAL TERMINATION N MALE, 1 WATTS WITH CHAIN

VIEW	PART NO. ANO 751-155
SIZE A3	SCALE 4:1
SHEET 1/1	REV. A

4 3 2 1