

4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/14/26	J Q

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PEI
- 4 COUPLING NUT: STAINLESS STEEL, PASSIVATED

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.05 MAX.
- 4 POWER: 0.5 WATT MAX.

ENVIRONMENTAL DATA:

- 1 OPERATING TEMPERATURE: +15°C~+35°C
- 2 STORAGE TEMPERATURE: -40°C~+85°C
- 3 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
- 4 1999/45/EC (REACH): COMPLIANT

MECHANICAL DATA:

- 1 RECOMMENDED TORQUE: 1.35 NM.

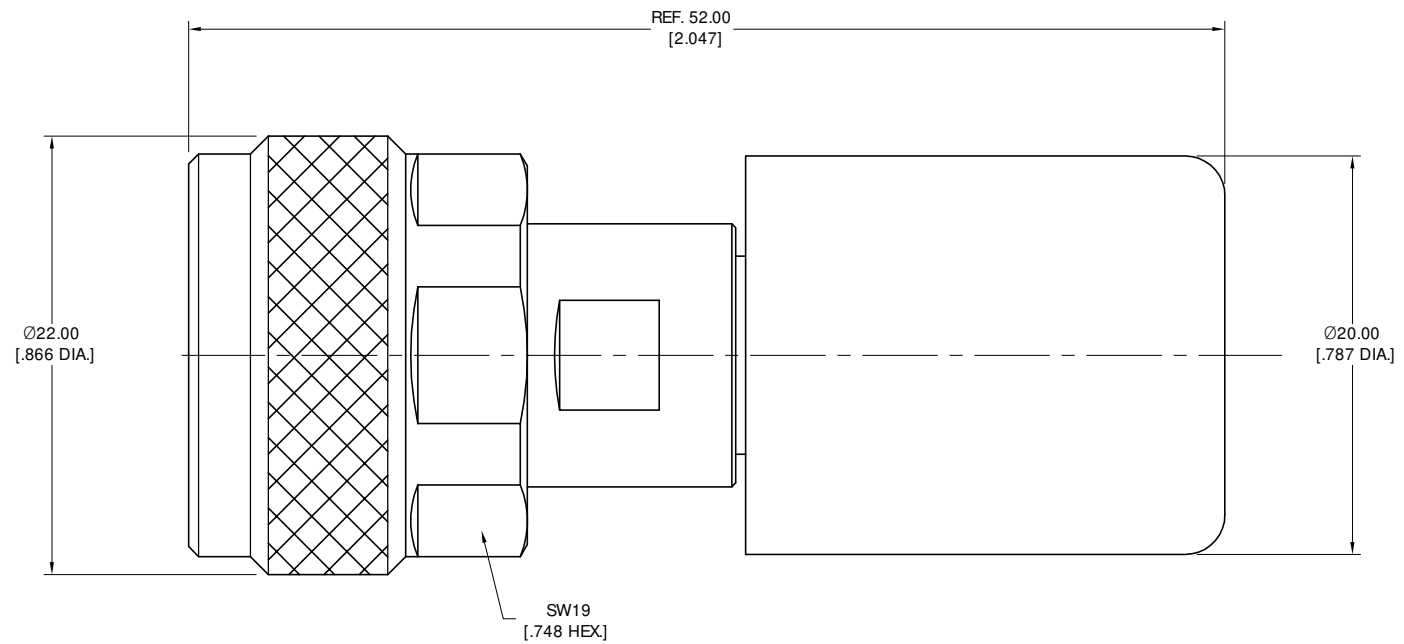

DRAWN	P. C	DATE	01/14/26
CHECKED	W. Y	DATE	01/14/26
APPROVED	J Q	DATE	01/14/26
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2026 ANOISON ELECTRONICS LTD	
.XX	±0.13 [0.005"]		
.X	±0.20 [0.008"]		
X	±0.50 [0.019"]		
.X°	±1°		
X°	±2°		

ANOISON
..we create connection for technologies

TITLE			
COAXIAL TERMINATION N MALE, 0.5 WATTS, DC~18 GHz			
VIEW		PART NO.	
		ANO 751-183	
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	A

4 3 2 1