

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/04/18	J. QU
B	1. VSWR CHANGED 2. PART NO. ANO 751-210-I REMOVED	05/25/18	J. QU
C	2015/863/(RoHS) AND 1907/2006/EC(REACH) ADDED	04/17/20	J. QU

MATERIAL & FINISH:


- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+125 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-18 GHZ
- 3 VSWR: 1.15 MAX. @ DC-11 GHZ
1.25 MAX. @ 11-18 GHZ
- 4 AVERAGE POWER: 2 W AVERAGE TO 25°C AMBIENT TEMPRATRUE, DERATED LINEARLY TO 0.2 W @ 125°C
- 5 PEAK POWER: 250 KW (5μS PLUSE WIDTH WITH 0.8% DUTY CYCLE)

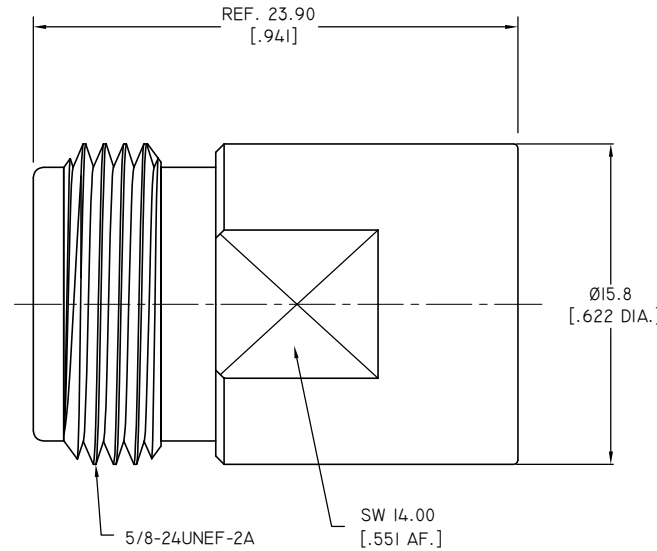

DRAWN	X. B. YANG	DATE	04/17/20
CHECKED	W. YANG	DATE	04/17/20
APPROVED	J. QU	DATE	04/17/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
COAXIAL TERMINATION, N FEMALE, 2 WATTS, DC ~18GHZ			
VIEW		PART NO.	
		ANO 751-210	
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	C

4

3

2

1