

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 RESISTANCE: BERYLLIUM OXIDE


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~11 GHZ
- 3 VSWR: 1.20 MAX.
- 4 AVERAGE POWER: 2 W AVERAGE TO 25°C AMBIENT TEMPERATRUE, DERATED LINEARLY TO 0.2 W @ 125°C
- 5 PEAK POWER: 500 W (5μS PULSE WIDTH WITH 0.8% DUTY CYCLE)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/18/12	J. QU
B	1. VSWR CHANGED 2. DRAWING FORMAT REMOVED	05/25/18	J. QU

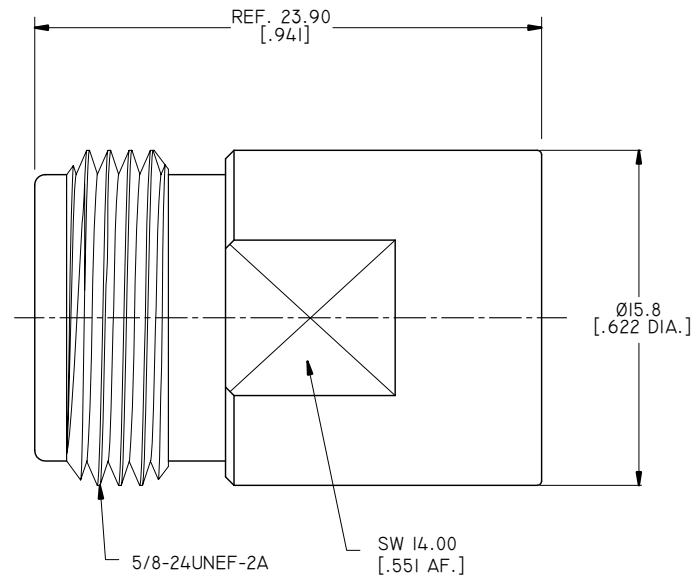

DRAWN	X. B. YANG	DATE	05/25/18
CHECKED	W. YANG	DATE	05/25/18
APPROVED	J. QU	DATE	05/25/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
COAXIAL TERMINATION, N FEMALE, 2 WATTS, DC~11GHZ

VIEW	PART NO. ANO 751-211		
	SIZE A3	SCALE 4:1	SHEET 1/1
		REV. B	

4

3

2

1