

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATED
- 3 INSULATOR: PEI
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 RADIATOR: ALUMINIUM, BLACK

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~12.4 GHz
- 3 VSWR: 1.35 MAX.
- 4 AVERAGE POWER: 25 W AVERAGE TO 25°C AMBIENT TEMPERATRUE, DERATED LINEARLY TO 2.5 W @ 125°C
- 5 PEAK POWER: 600 W (5μS PLUSE WIDTH WITH 2% DUTY CYCLE)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/2006/EC(REACH): COMPLIANT

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/10/25	J. Q

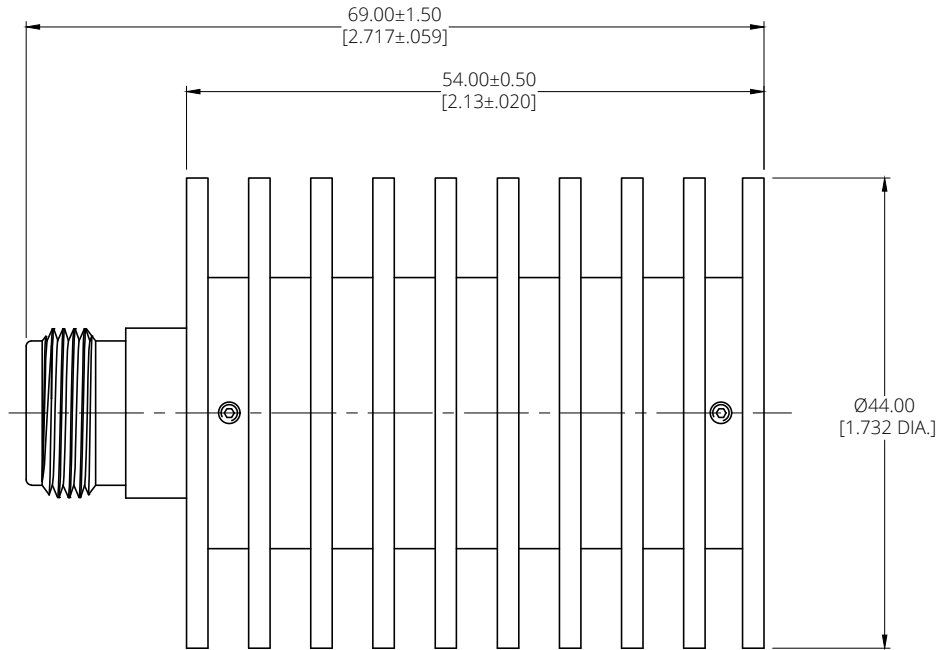

DRAWN	P. C	DATE	04/10/25
CHECKED	W. Y	DATE	04/10/25
APPROVED	J. Q	DATE	04/10/25
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD	
	.XX	±0.13 [005"]	
	.X	±0.20 [008"]	
	X	±0.50 [019"]	
	X*	±1°	
	X*	±2°	



TITLE  
COAXIAL TERMINATION N FEMALE, 25 WATTS, DC~12.4 GHz

VIEW	PART NO. ANO 751-275			
	SIZE A3	SCALE 2:1	SHEET 1/1	REV. A

4

3

2

1