

**MATERIAL & FINISH:**

1. BODY: BRASS, ALBALOY PLATED
2. CENTER CONTACT: BRASS, SILVER PLATED
3. INSULATOR: PTFE
4. COUPLING NUT: BRASS, ALBALOY PLATED
5. RESISTANCE: BERYLLIUM OXIDE
6. RADIATOR: ALUMINIUM, BLACK PLATED
7. GASKET: MVQ(SILICONE RUBBER)


**ENVIRONMENTAL DATA:**

1. TEMPERATURE RANGE: -55°C~+125°C
2. 2011/65/EU (RoHS): COMPLIANT

**ELECTRICAL DATA:**

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~6GHZ
3. VSWR: ≤1.15 AT DC~3GHZ  
≤1.25 AT 3~6GHZ
4. AVERAGE POWER: 25 WATTS
5. PEAK POWER: 3000 WATTS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/09/14	J. QU

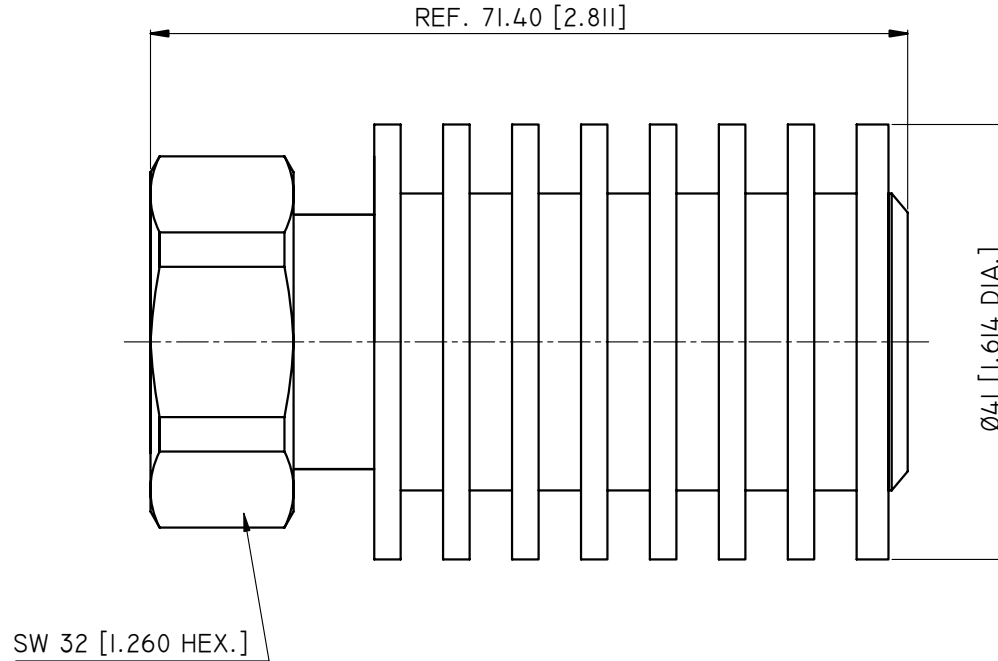

**NOTES:**

1. THIS PRODUCT CONTAINS BERYLLIA CERAMIC INSIDE, WHICH IS POTENTIALLY HARMFUL TO THE ENVIRONMENT. DISPOSE OF CORRECTLY

DRAWN X. B. YANG	DATE 07/09/14			
CHECKED L. YANG	DATE 07/09/14			
APPROVED J. QU	DATE 07/09/14			
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2013 ANOISON</small>		
<small>.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°</small>		<b>TITLE</b> COAXIAL TYERMINATION, 7/16 MALE 25 WATTS, DC~6GHZ		
<b>VIEW</b> 		<b>PART NO.</b> ANO 756-103		
<b>SIZE</b> A3		<b>SCALE</b> 2:1	<b>SHEET</b> 1/1	<b>REV.</b> A