MATERIAL & FINISH:
1 BODY: STAINLESS STEEL, PASSIVATEDL
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: PEI & PTFE

ELECTRICAL DATA:
1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~110 GHz

ENVIRONMENTAL DATA:
1 TEMPERATURE RANGE: -55℃~+165℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/19/20	J. QU

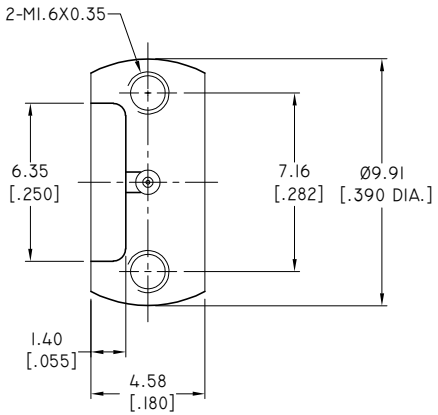

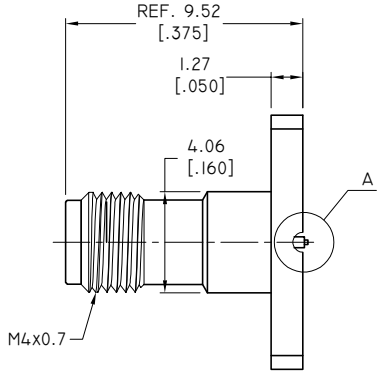



DETAIL A

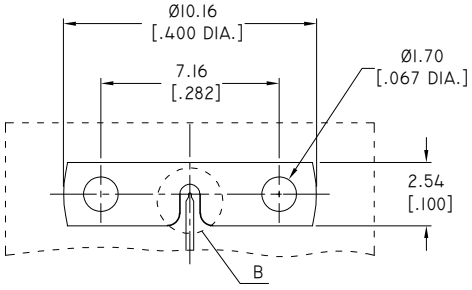

PCB MOUNTING DETAIL



DETAILB

DRAWN	W. YANG	DATE 11/19/20
CHECKED	L. YANG	DATE 11/19/20
APPROVED	J. QU	DATE 11/19/20

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.08 [.003"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD

ANOISON

TITLE
IMM STRAIGHT FEMALE, VERTICAL LAUNCH, MICROSTRIP 2 HOLE .400 LONG FLANGE COMPRESSION MOUNT

VIEW

PART NO. ANO 7612-3012

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A