

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 SHROUD: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 4 SLEEVE: STAINLESS STEEL, PASSIVATED
- 5 INSULATOR: PTFE



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~65 GHz
- 3 VSWR: 1.35 MAX.

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55 °C ~ +165 °C
- 2 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC (REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/14/23	J Q

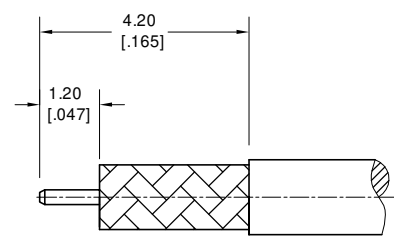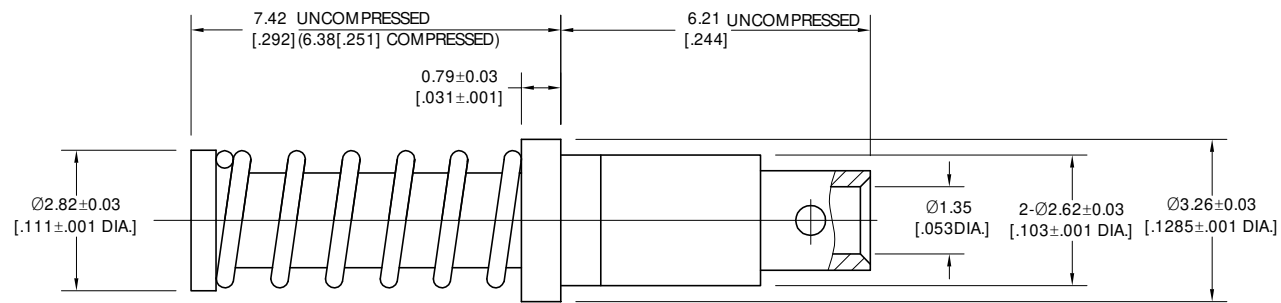


CABLE STRIPPING DIMENSIONS

DRAWN	P. C	DATE	04/14/23
CHECKED	X. Y	DATE	04/14/23
APPROVED	J Q	DATE	04/14/23
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD	
	.XX	±0.13	[.005"]
	.X	±0.20	[.008"]
	X	±0.50	[.019"]
	.X°	±1°	
	X°	±2°	



TITLE
SMPS MALE SOLDER FOR .047 CABLE, BLIND-MATE FOR 2M805 (MICRO 38999) RECEPTACLE SIZE 16

VIEW 

PART NO. ANO 7811-2008			
SIZE A3	SCALE 10:1	SHEET 1/1	REV. A

D

D

C

C

B

B

A

A

4

3

2

1