

MATERIAL & FINISH:

- 1 BODY: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 SHROUD: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 4 SLEEVE: STAINLESS STEEL, PASSIVATED
- 5 INSULATOR: PTFE



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-65 GHz

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +165°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/06/23	J. Q

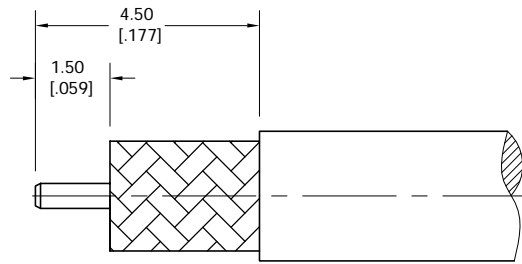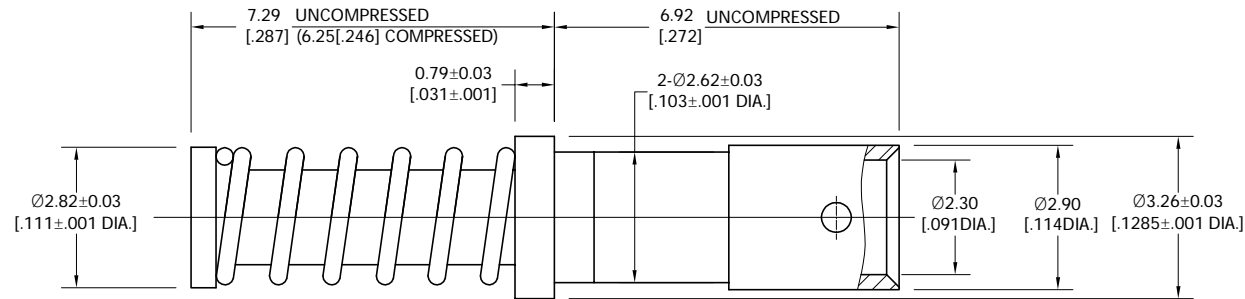

CABLE STRIPPING DIMENSIONS

DRAWN	P. C	DATE	04/06/23
CHECKED	X. Y	DATE	04/06/23
APPROVED	J. Q	DATE	04/06/23

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

XX	±0.13 [005"]
X	±0.20 [008"]
x	±0.50 [019"]
X°	±1°
x°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD



TITLE
SMPS MALE SOLDER FOR .086 CABLE, BLIND-MATE FOR 2M805 (MICRO 38999) RECEPTACLE SIZE 16

VIEW	PART NO. ANO 7811-2010	SIZE A3	SCALE 10:1	SHEET 1/1	REV. A
------	---------------------------	------------	---------------	--------------	-----------