

MATERIAL & FINISH:

- 1 BODY: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 RETAINING RING: BERYLLIUM COPPER ALLOY, NICKEL PLATED
- 4 INSULATOR: PTFE
- 5 COMPRESSION SPRING: STAINLESS STEEL, PASSIVATED
- 6 SLEEVE: STAINLESS STEEL, PASSIVATED
- 7 WASHER: STAINLESS STEEL, PASSIVATED
- 8 FERRULE: BRASS, GOLD PLATED



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHz



ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+165 °C
- 2 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC (REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/13/23	J Q
B	ADDED MODULE 9321-60093	07/02/24	J Q

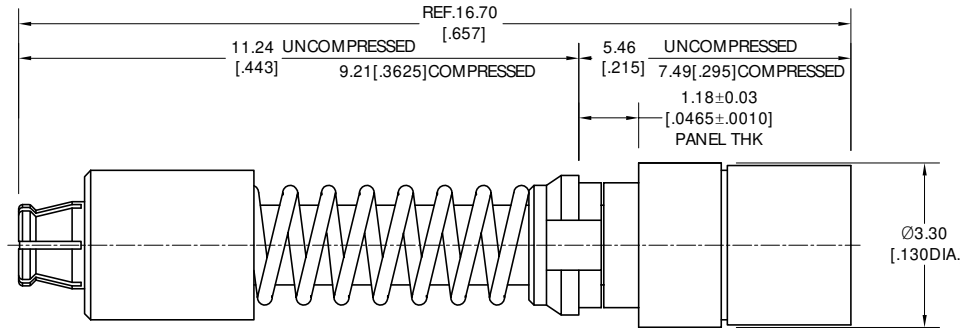

CABLE STRIPPING DIMENSIONS

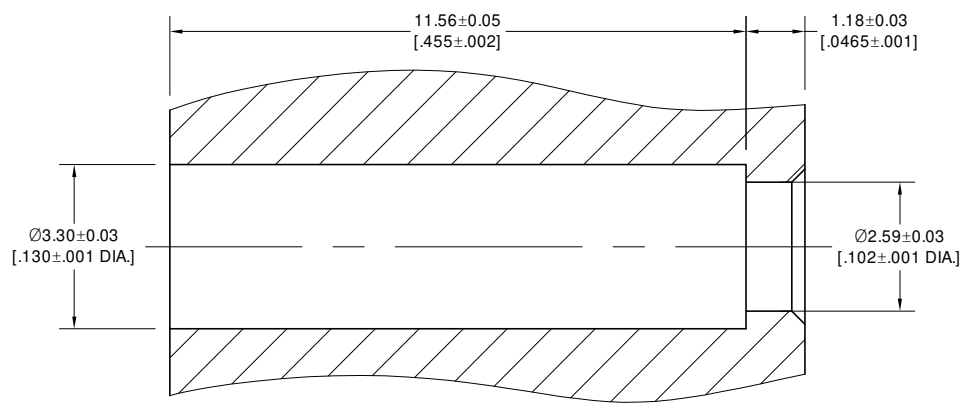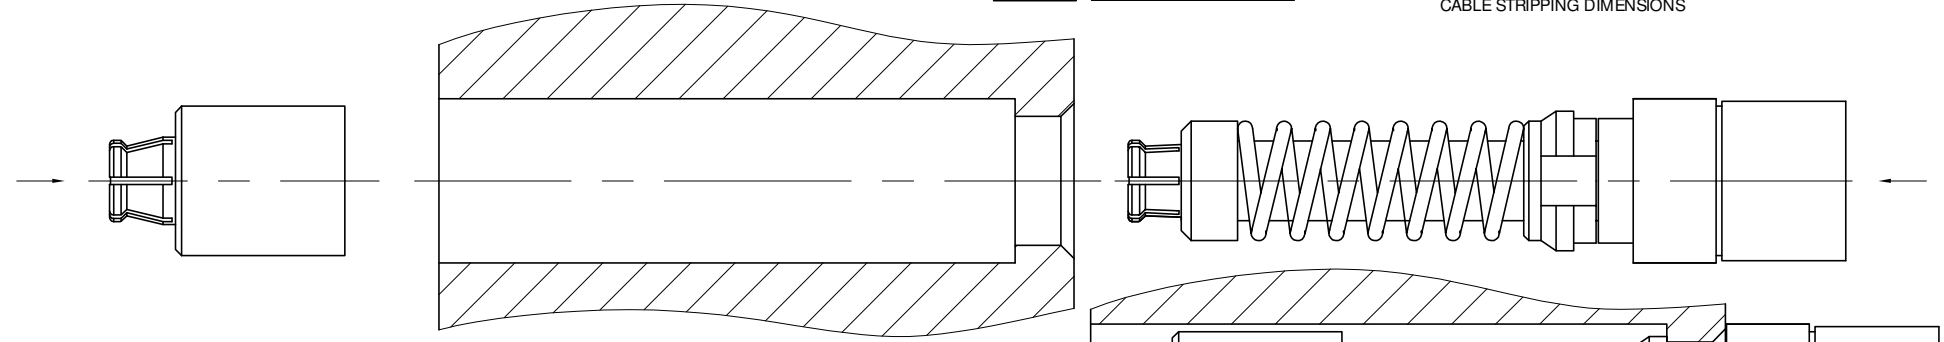

RECOMMENDED MOUNTING HOLE
(SV BACKPLATE MODULE 9321-60093)

DRAWN	P. C	DATE	07/02/24
CHECKED	X. Y	DATE	07/02/24
APPROVED	J Q	DATE	07/02/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
XX	±0.13 [.005"]		
X	±0.20 [.008"]		
X	±0.50 [.019"]		
X'	±1°		
X'	±2°		



TITLE			
SMPS VITA 67.3 Backplane Contact for .086 Cable			
VIEW		PART NO.	
		ANO 7812-2007	
SIZE	SCALE	SHEET	REV.
A3	10:1	1/1	B