

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/01/21	J. QU

MATERIAL & FINISH



- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 OUTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 4 INSULATOR: PTFE
- 5 RESISTANCE: BERYLLIUM OXIDE

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~70 GHZ
- 3 VSWR: 1.20 MAX. @ DC ~ 18 GHZ
1.30 MAX. @ 18 GHZ ~ 40 GHZ
- 4 AVERAGE POWER: 0.25 WATTS AVERAGE TO 25°C AMBIENT
TEMPERATURE, DERATED LINEARLY TO 0 W @ 125°C

ENVIRONMENTAL DATA:

- 1 OPERATING TEMPERATURE RANGE: -55°C~+125°C
- 2 STORAGE TEMPERATURE RANGE: -55°C~+125°C
- 3 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 4 1999/45/EC(REACH): COMPLIANT

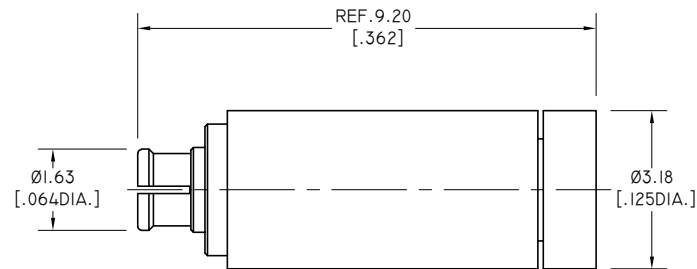

DRAWN	W. YANG	DATE	03/01/21
CHECKED	L. YANG	DATE	03/01/21
APPROVED	J. QU	DATE	03/01/21
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
X°	±1°		
X*	±2°		



TITLE
COAXIAL TERMINATION
SMPS FEMALE, 0.25 WATTS, DC~70GHZ

VIEW	PART NO. ANO 784-201		
	SIZE A3	SCALE 10:1	SHEET 1/1
		REV. A	

4

3

2

1