

4

3

2

1

MATERIAL & FINISH

- 1 BODY: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 RESISTANCE: BERYLLIUM OXIDE


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~40 GHZ
- 3 VSWR: 1.15+.011XF(GHZ)
- 4 AVERAGE POWER: 0.25 WATTS AVERAGE TO 25°C AMBIENT TEMPERATRUE, DERATED LINEARLY TO 0 W @ 125°C

ENVIRONMENTAL DATA:

- 1 OPERATING TEMPERATURE RANGE: -55°C~+125°C
- 2 STORAGE TEMPERATURE RANGE: -55°C~+125°C
- 3 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/25/18	J. QU

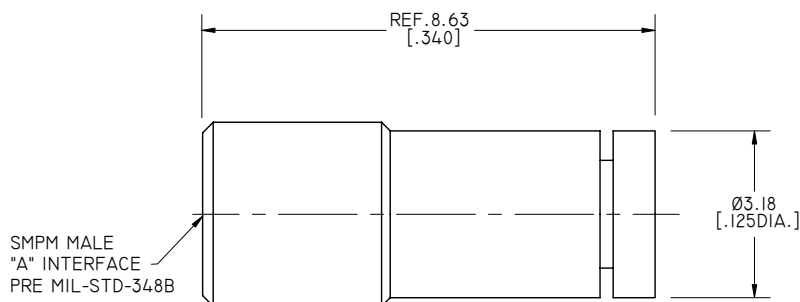

PART NO.	"A" INTERFACE
ANO 794-104-1	FULL DETENT
ANO 794-104-2	SMOOTH BORE

DRAWN	P. CHEN	DATE	05/25/18
CHECKED	L. YANG	DATE	05/25/18
APPROVED	J. QU	DATE	05/25/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
COAXIAL TERMINATION
SMPM MALE, 0.25 WATTS, DC~40GHZ

VIEW	PART NO. ANO 794-104			
	SIZE A3	SCALE 10:1	SHEET 1/1	REV. A

4

3

2

1

D

C

B

A

D

C

B

A