

4

3

2

1

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/31/22	J. QU

MATERIAL & FINISH



- 1 BODY: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 2 OUTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 4 INSULATOR: PTFE
- 5 RESISTANCE: BERYLLIUM OXIDE

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC-18 GHZ
- 3 VSWR: 1.30 MAX.
- 4 AVERAGE POWER: 0.5 WATTS AVERAGE TO 25°C AMBIENT TEMPERATRUE, DERATED LINEARLY TO 0 W @ 125°C

ENVIRONMENTAL DATA:

- 1 OPERATING TEMPERATURE RANGE: -55 °C~+125 °C
- 2 STORAGE TEMPERATURE RANGE: -55 °C~+125 °C
- 3 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 4 1999/45/EC(REACH): COMPLIANT

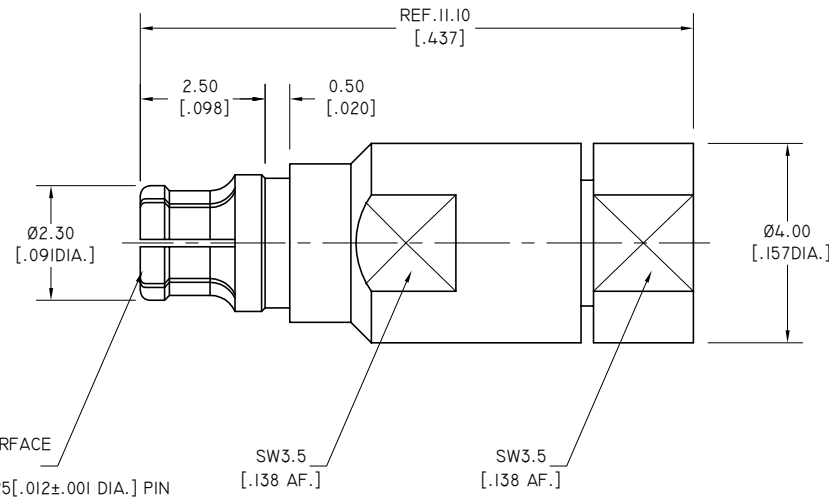

DRAWN	P. CHEN	DATE	05/31/22
CHECKED	L. YANG	DATE	05/31/22
APPROVED	J. QU	DATE	05/31/22
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
X°	±1°		
X°	±2°		



TITLE COAXIAL TERMINATION SMPM FEMALE, 0.5 WATTS, DC-18GHZ			
VIEW	PART NO. ANO 794-206		
	SIZE A3	SCALE 10:1	SHEET 1/1
		REV. A	

4

3

2

1