

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, GOLD PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 5 RETAINING RING: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 6 GASKET: SILICONE RUBBER
- 7 INSULATOR: PTFE



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~34GHZ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+155°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/29/22	J. QU
B	FREQUENCY RANGE CHANGDE TO DC~34GHZ	03/03/22	J. QU

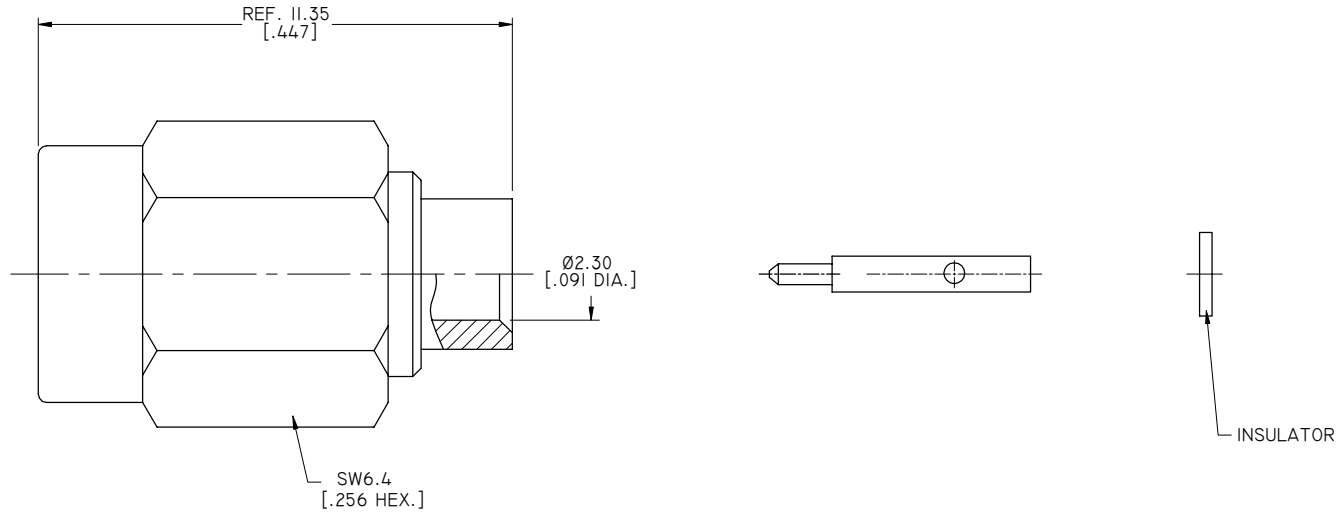

CABLE STRIPPING DIMENSIONS

DRAWN	W. YANG	DATE	03/03/22
CHECKED	XB. YANG	DATE	03/03/22
APPROVED	J. QU	DATE	03/03/22

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:


.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD



TITLE
SSMA STRAIGHT MALE SOLDER FOR .086 CABLE

VIEW



PART NO.
ANO 9111-2047

SIZE A3	SCALE 5:1	SHEET 1/1	REV. B
------------	--------------	--------------	-----------