

MATERIAL & FINISH:

- 1 BODY: BRASS, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 LOCK WASHER: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 5 FASTENING NUT: BRASS, GOLD PLATED
- 6 O-RING: SILICONE RUBBER



ELECTRICAL DATA:



- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.25 MAX.
- 4 VOLTAGE RATING: 500 V MIN.
- 5 DEGREE OF PROTECTION: IP 68

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/19/18	J. QU
B	CHANGED ELECTRICAL DATA	01/22/18	J. QU

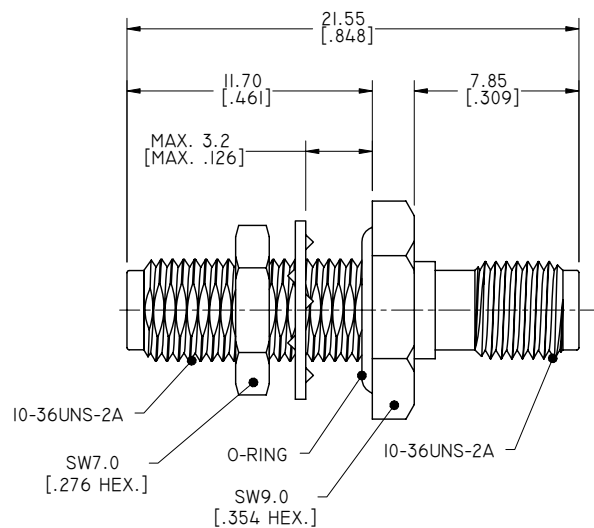

DRAWN	P. CHEN	DATE	01/22/18	 <p><b>ANOISON</b> ...we create connection for technologies</p>			
CHECKED	L. YANG	DATE	01/22/18				
APPROVED	J. QU	DATE	01/22/18				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD		TITLE	ADAPTER, SSMA BULKHEAD WATERPROOF FEMALE TO SSMA FEMALE		
.XX ±0.13 [ .005" ] .X ±0.20 [ .008" ] X ±0.50 [ .019" ] .X° ±1° X° ±2°		VIEW 		PART NO.	ANO 912-912-1440		
SIZE	A3	SCALE	4:1	SHEET	1/1	REV.	B