

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 LOCK WASHER: STAINLESS STEEL, PASSIVATED
- 4 LOCK NUT: STAINLESS STEEL, PASSIVATED
- 5 INSULATOR: PEI

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55°C~+155°C
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHz

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/19/16	J. QU

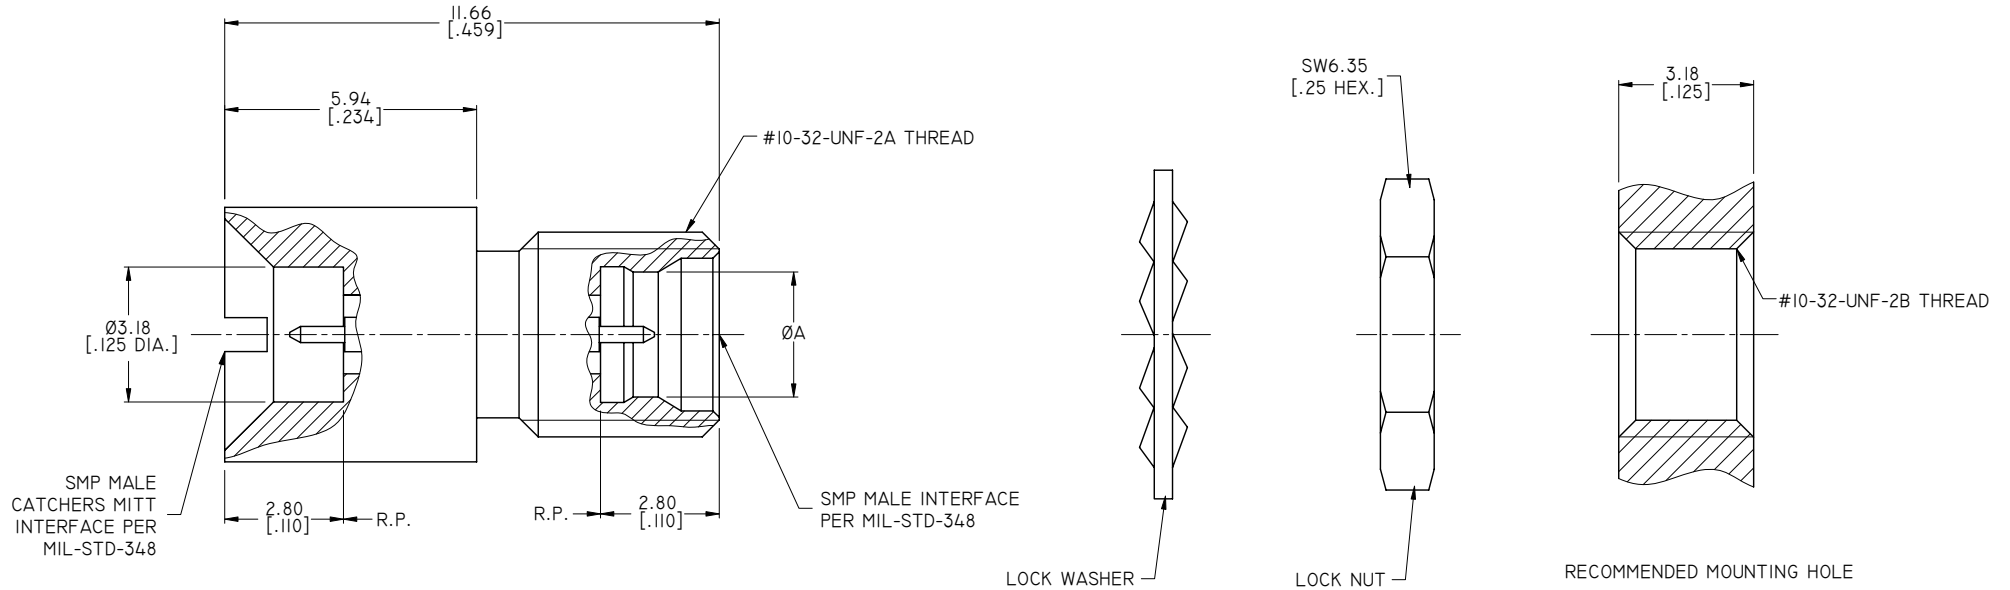

ANO PART NO.	INTERFACE	ØA
ANO 931-931-I382-1	FULL DETENT	Ø2.95 [.116 DIA.]
ANO 931-931-I382-2	LIMITED DETENT	Ø3.05 [.120 DIA.]
ANO 931-931-I382-3	SMOOTH BORE	Ø3.18 [.125 DIA.]

NOETS:
FASTENING NUT, LOCK WASHER AND O-RING INDIVIDUALLY PACKED

DRAWN X. B. YANG	DATE 09/19/16											
CHECKED L. YANG	DATE 09/19/16											
APPROVED J. QU	DATE 09/19/16											
<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</p> <table border="0"> <tr> <td>.XX</td> <td>±0.13 [.005"]</td> </tr> <tr> <td>.X</td> <td>±0.20 [.008"]</td> </tr> <tr> <td>X</td> <td>±0.50 [.019"]</td> </tr> <tr> <td>.X°</td> <td>±1°</td> </tr> <tr> <td>X°</td> <td>±2°</td> </tr> </table>		.XX	±0.13 [.005"]	.X	±0.20 [.008"]	X	±0.50 [.019"]	.X°	±1°	X°	±2°	<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD</p>
.XX	±0.13 [.005"]											
.X	±0.20 [.008"]											
X	±0.50 [.019"]											
.X°	±1°											
X°	±2°											
TITLE ADAPTER, SMP STRAIGHT MALE BULKHEAD TO SMP MALE		VIEW 										
PART NO. ANO 931-931-I382		SIZE A3										
SCALE 8:1		SHEET 1/1										
REV. A												