REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/15/24	J. Q

MATERIAL & FINISH:
1 BODY: KOVAR, GOLD PLATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: CORNING 7070 GLASS

ENVIRONMENTAL DATA:
1 TEMPERATURE RANGE: -55℃~+125℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1907/2006/EC(REACH): COMPLIANT
4 HERMETICITY: 1X10^{-8} CC/SEC AT ONT ATMOSPHERE

ELECTRICAL DATA:
1 IMPEDANCE: 50 OHMS
2 FREQUENCY RANGE: DC~40 GHz

RECOMMEDENE TORQUE:
1 PANEL NUT: 6~8 IN.LBS

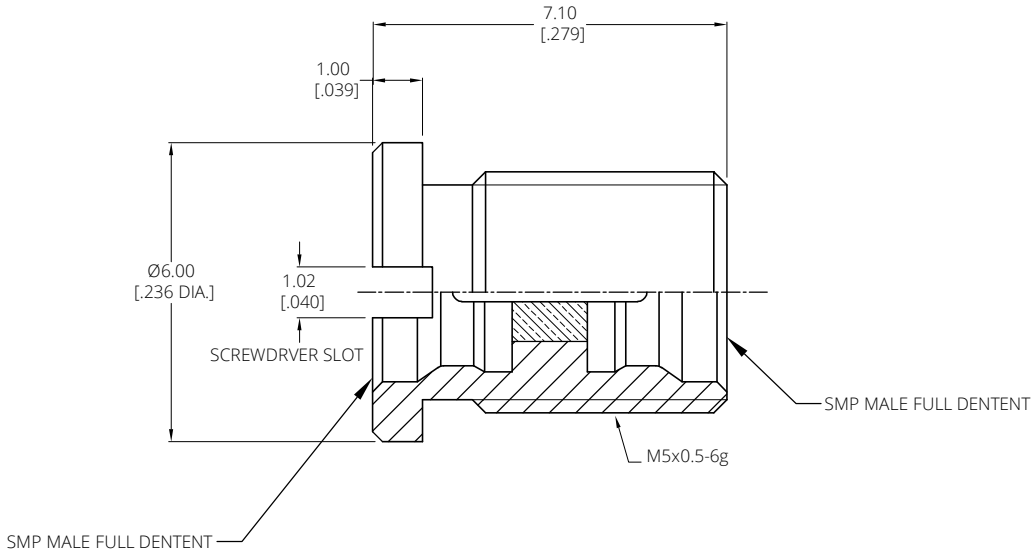

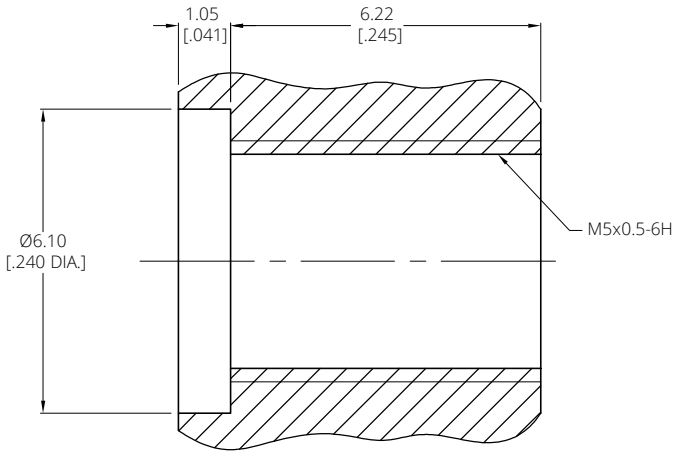

RECOMMEND MOUNTING HOLE

DRAWN	W. Y	DATE	07/15/24
CHECKED	X. Y	DATE	07/15/24
APPROVED	J. Q	DATE	07/15/24

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD

ANOISON

TITLE
SMP STRAIGHT MALE FULL DETENT, THREAD-IN ADAPTER, HERMETIC SEAL

VIEW

PART NO.
ANO 931-931-1677

SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	A