

MATERIAL & FINISH:

- 1 FLANGE BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 SOLDER BODY: BRASS, GOLD PLATED
- 4 INSULATOR: PTFE



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHz
- 3 VSWR: ≤ 1.50
- 4 INSERTION LOSS: 0.12√F(GHZ) GB
- 5 DIELECTRIC WITHSTANDING VOLTAGE: 500V

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -65°C~+165°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/21/15	J. QU

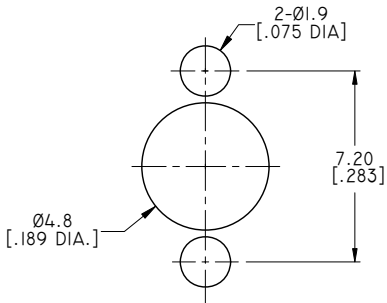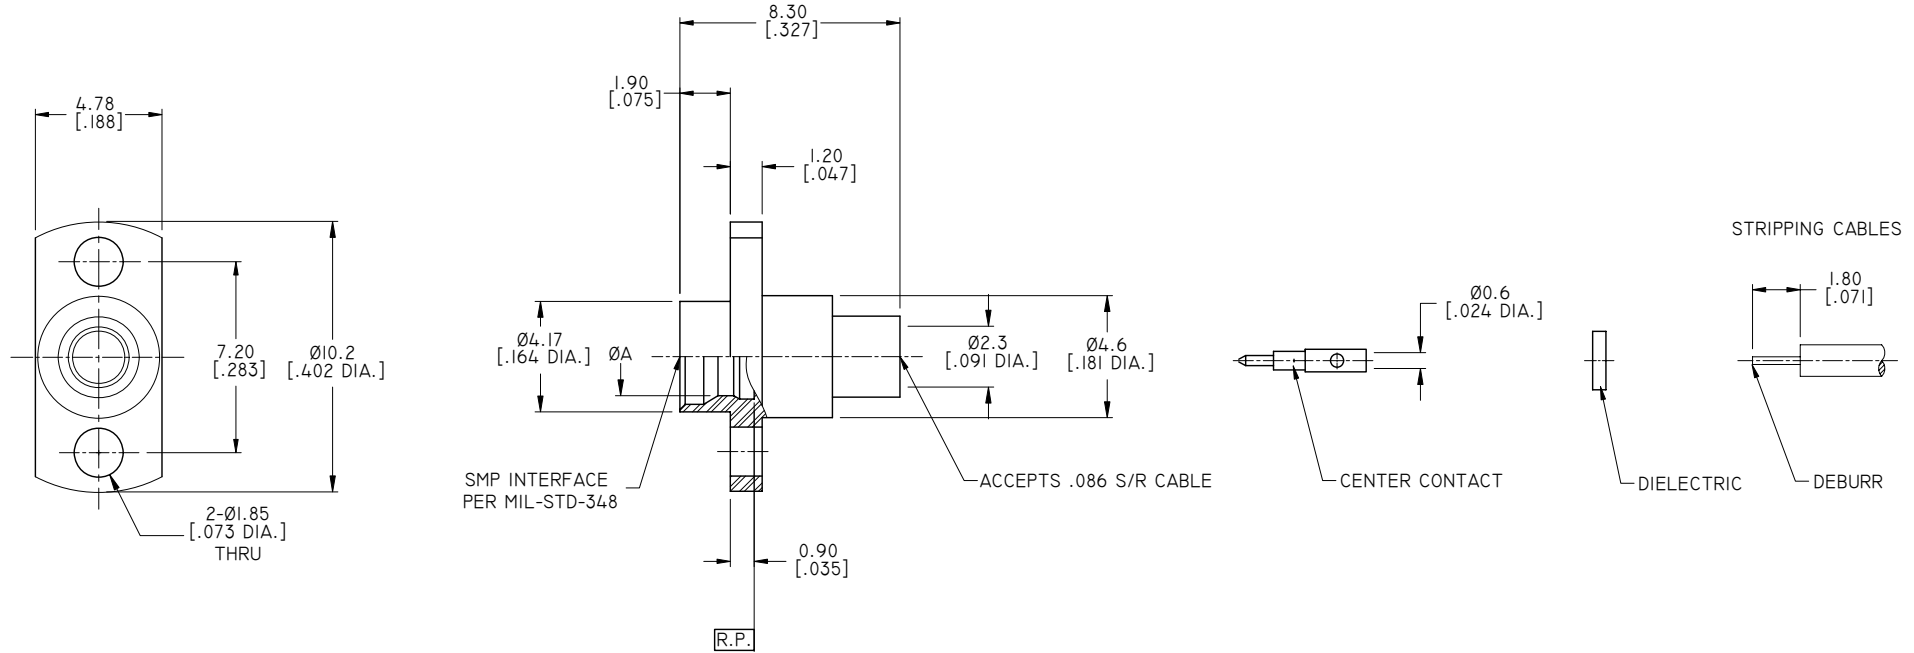

PART NO.	TYEP	ØA
ANO 9311-2052-1	FULL DETENT	Ø2.95 [.116 DIA.]
ANO 9311-2052-2	LIMITED DETENT	Ø3.05 [.120 DIA.]
ANO 9311-2052-3	SMOOTH BORE	Ø3.18 [.125 DIA.]

DRAWN	P. CHEN	DATE	11/21/15
CHECKED	L. YANG	DATE	11/21/15
APPROVED	J. QU	DATE	11/21/15
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		

ANOISON
...we create connection for technologies

TITLE: SMP MALE, 2 HOLE FLANGE MOUNT FOR .086 S/R CABLE

VIEW:

PART NO. ANO 9311-2052

SIZE	A3	SCALE	5:1	SHEET	1/1	REV.	A
------	----	-------	-----	-------	-----	------	---