

4 3 2 1

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 FERRULE: BRASS, GOLD PLATED


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-40 GHZ
- 3 VSWR: 1.50 MAX.
- 4 INSERTION LOSS: 0.12 X √FGHZ DB MAX.


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -65°C-+165°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/19/20	J. QU



RECOMMEND MOUNTING HOLE

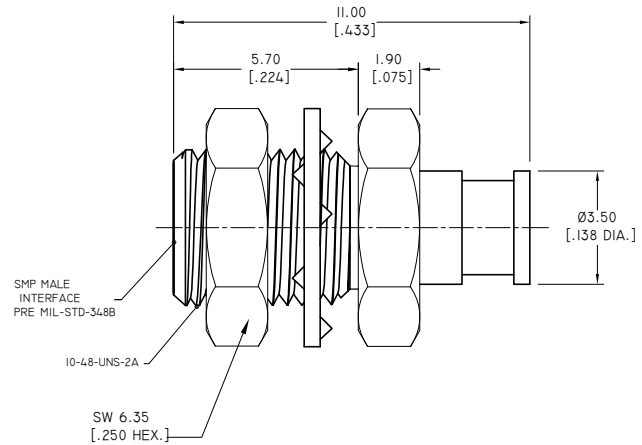

PART NO.	TYPE
ANO 9311-5119	FULL DETENT
ANO 9311-5119-1	LIMITED DETENT
ANO 9311-5119-2	SMOOTH BORE

DRAWN	W. YANG	DATE	11/19/20
CHECKED	L. YANG	DATE	11/19/20
APPROVED	J. QU	DATE	11/19/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
SMP STRAIGHT MALE BULKHEAD SOLDER FOR .086 CABLE

VIEW	PART NO. ANO 9311-5119			
	SIZE A3	SCALE 6.5:1	SHEET 1/1	REV. A

4 3 2 1