

4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/25/21	J QU
B	DC-18 GHz WAS DC-26.5 GHz	01/19/22	J QU

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 BLKHD NUT: STAINLESS STEEL, PASSIVATED
- 4 INSULATOR: PTFE
- 5 FERRULE: BRASS, GOLD PLATED

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-18 GHz
- 3 VSWR: 1.30 MAX
- 4 INSERTION LOSS: .06*√F(GHZ) DB

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+165 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

MECHANICAL:

- 1 ENGAGE: 7.0 LBS MAX.
- 2 DISENGAGE: 9.0 LBS MAX.

D

C

B


A

D

C

B

A

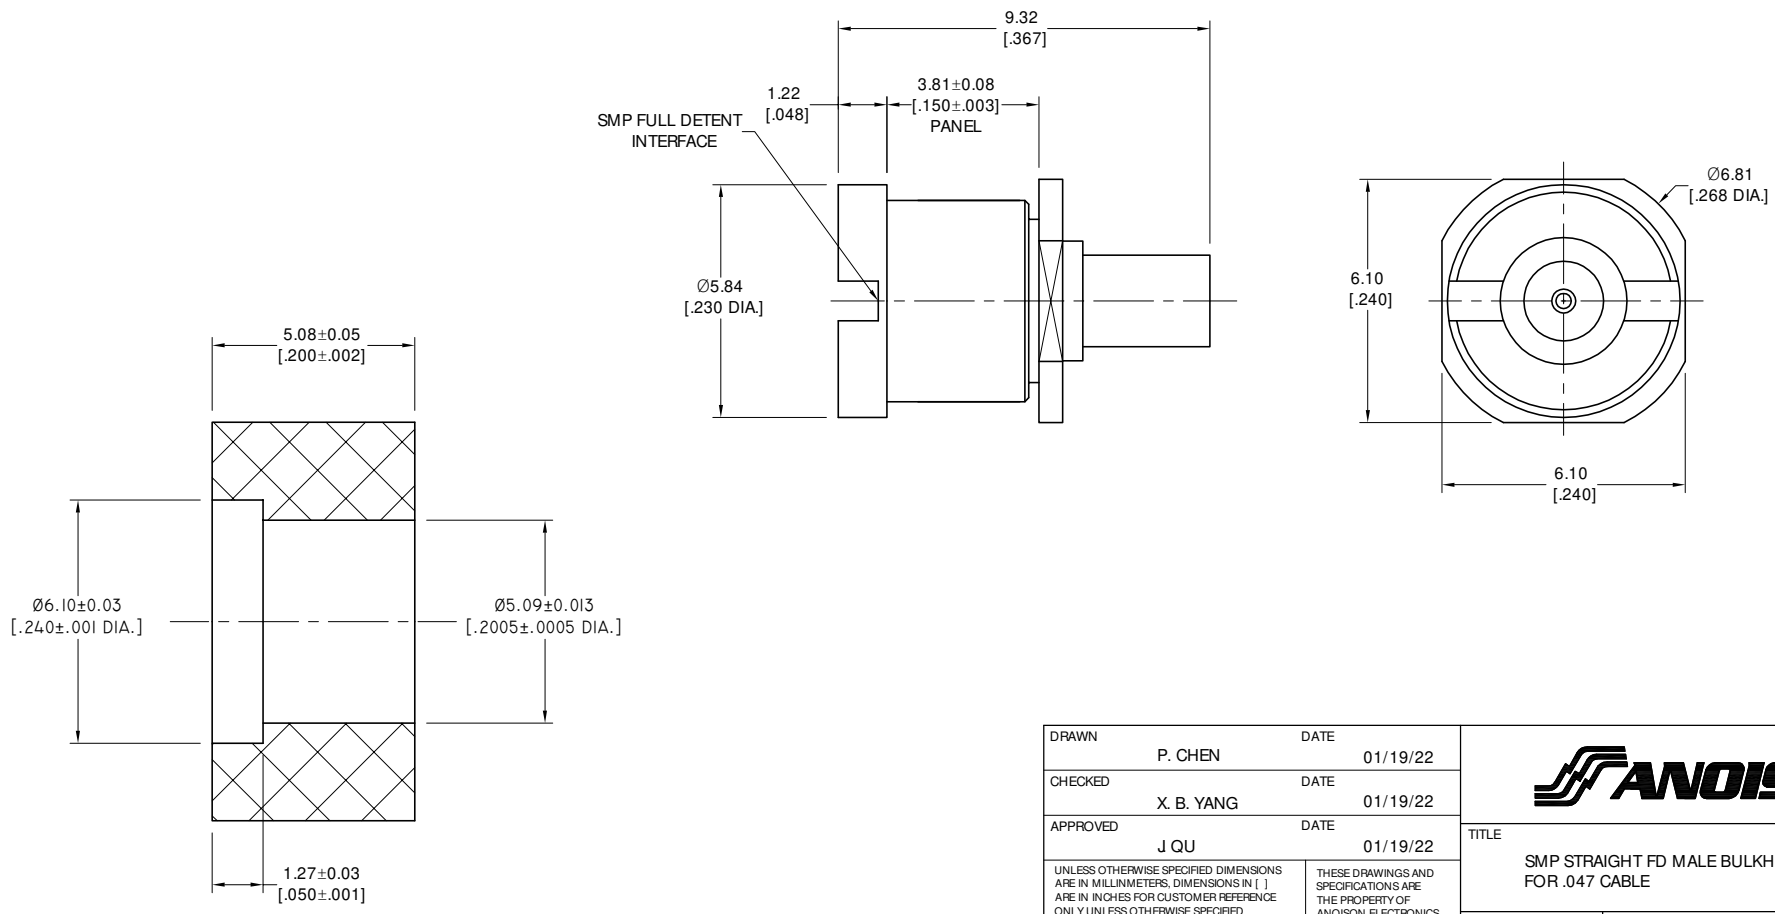

DRAWN	P. CHEN	DATE	01/19/22
CHECKED	X. B. YANG	DATE	01/19/22
APPROVED	J QU	DATE	01/19/22
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X"	±1"		
X"	±2"		

ANOISON

TITLE
SMP STRAIGHT FD MALE BULKHEAD SOLDER FOR .047 CABLE

VIEW

PART NO.
ANO 9311-5125

SIZE A3	SCALE 8:1	SHEET 1/1	REV. B
------------	--------------	--------------	-----------

RECOMMENDED MOUNTING HOLE

4 3 2 1