

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -65°C ~ +125°C
- 2 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC (REACH): COMPLIANT

ELECTRICAL DATA:




- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-40 GHz
- 3 VSWR: 1.50 MAX.
- 4 INSULATION RES: 5000 MEGOHMS MAX.
- 5 DIELECTRIC WITHSTANDING VOLTAGE: 500 V MAX.

MECHANICAL DATA:

- 1 DURABILITY: 500 CYCLES MIN.
- 2 CAPTIVATION - CONTACT: 2.0 LBS MIN.

REVISIONS


| REV. | DESCRIPTION | DATE | APPROVED |
|------|-----------------|----------|----------|
| A | INITIAL RELEASE | 10/09/21 | J QU |

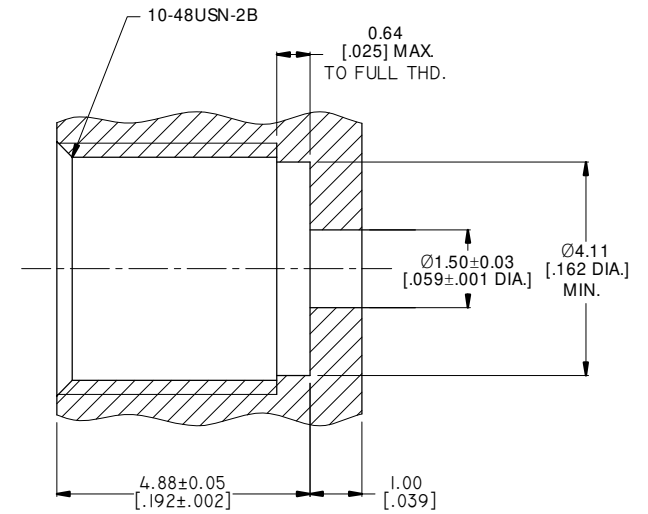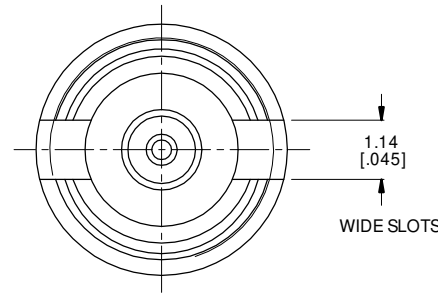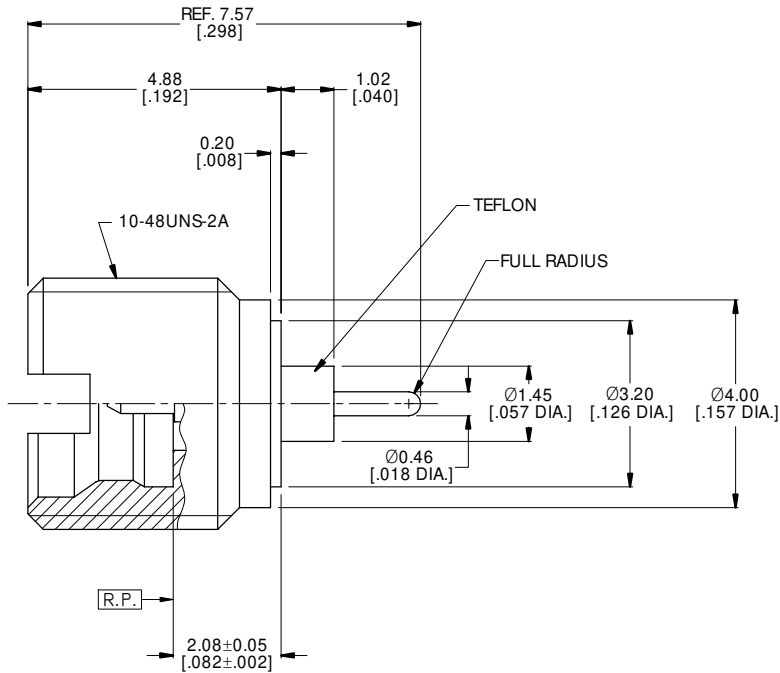

| | | | |
|---|---------------|--|----------|
| DRAWN | X. B. YANG | DATE | 10/09/21 |
| CHECKED | W. YANG | DATE | 10/09/21 |
| APPROVED | J QU | DATE | 10/09/21 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD | |
| .XX | ±0.13 [.005"] | | |
| .X | ±0.20 [.008"] | | |
| X | ±0.50 [.019"] | | |
| .X° | ±1° | | |
| X° | ±2° | | |



TITLE
SMP MALE FULL DETENT, THREAD-IN RECEPTACLE



| | | | |
|---------------------------|---------------|--------------|-----------|
| PART NO. ANO 9311-5129 | | | |
| SIZE A3 | SCALE 10:1 | SHEET 1/1 | REV. A |