

4

3

2

1

MATERIAL & FINISH:

1. OUTER CONTACT: BRASS, GOLD PLATED
2. CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
3. INSULATOR: PTFE
4. CATCHERS MITT NUT: STAINLESS STEEL, PASSIVATED

ELECTRICAL DATA:



1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~18GHZ

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -40°C~+85°C
2. 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3. 1999/45/EC(REACH): COMPLIANT

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/22/19	J. QU
B	CHANGED DRAWINGS	10/23/19	J. QU
C	CHANGED DRAWINGS	10/28/19	J. QU

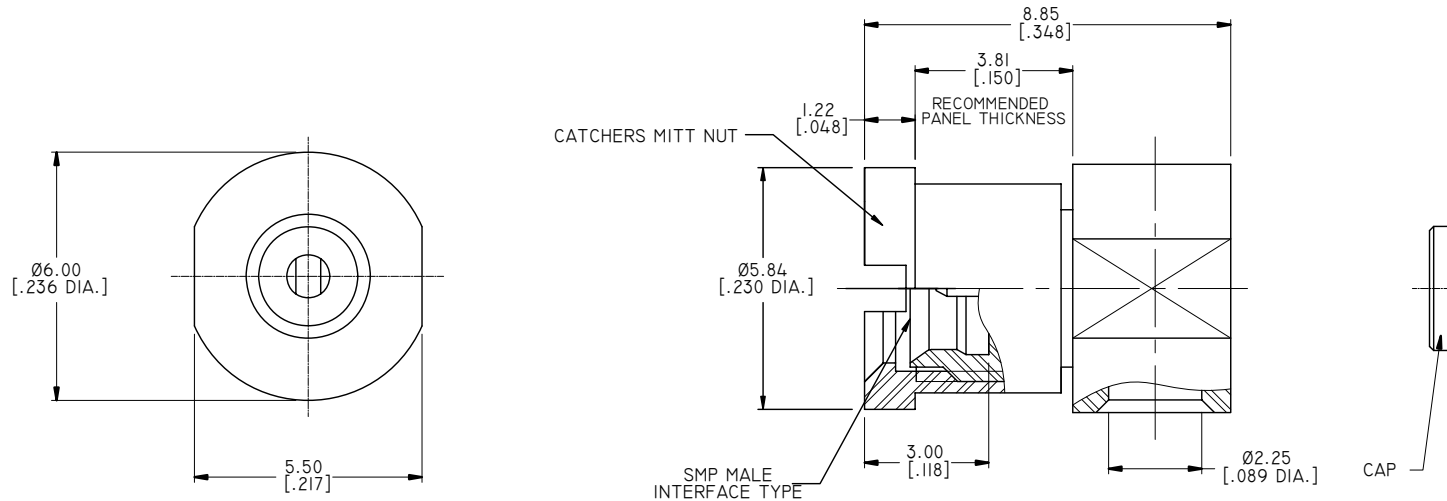

CABLE STRIPPING DIMENSIONS

PART NO.	TYPE	FORCE TO ENGAGE	FORCE TO DISENGAGE
ANO 932I-III2-1	FULL DETENT	68 N MAX.	22 N MIN.
ANO 932I-III2-2	LIMITED DETENT	45 N MAX.	9 N MIN.
ANO 932I-III2-3	SMOOTH BORE	9 N MAX.	2.2 N MIN.
ANO 932I-III2-4	CATCHERS MIT	9 N MAX.	2.2 N MIN.


DRAWN	P. CHEN	DATE	10/28/19
CHECKED	L. YANG	DATE	10/28/19
APPROVED	J. QU	DATE	10/28/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE

SMP R/A MALE CATCHERS MITT BULKHEAD MOUNT SOLDER FOR .086 CABLE

VIEW



PART NO.

ANO 932I-III2

SIZE
A3SCALE
8:1SHEET
1/1REV.
C

4

3

2

1