

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/10/19	J. QU

MATERIAL & FINISH:



- 1 BODY: BERYLLIUM COPPER ALLOY C17300, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY C17300, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 FRONT NUT: STAINLESS STEEL S30300, PASSIVATED

ELECTRICAL DATA:


- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC-40GHZ

ENVIRONMENTAL DATA:

- 1. TEMPERATURE RANGE: -40°C~+85°C
- 2. 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3. 1999/45/EC(REACH): COMPLIANT

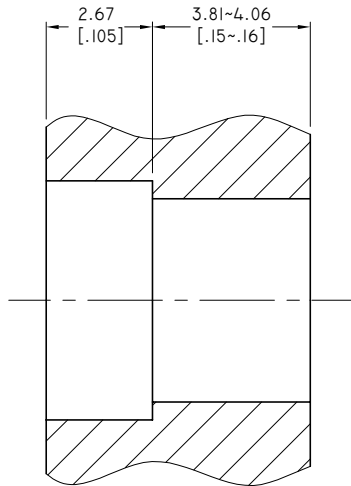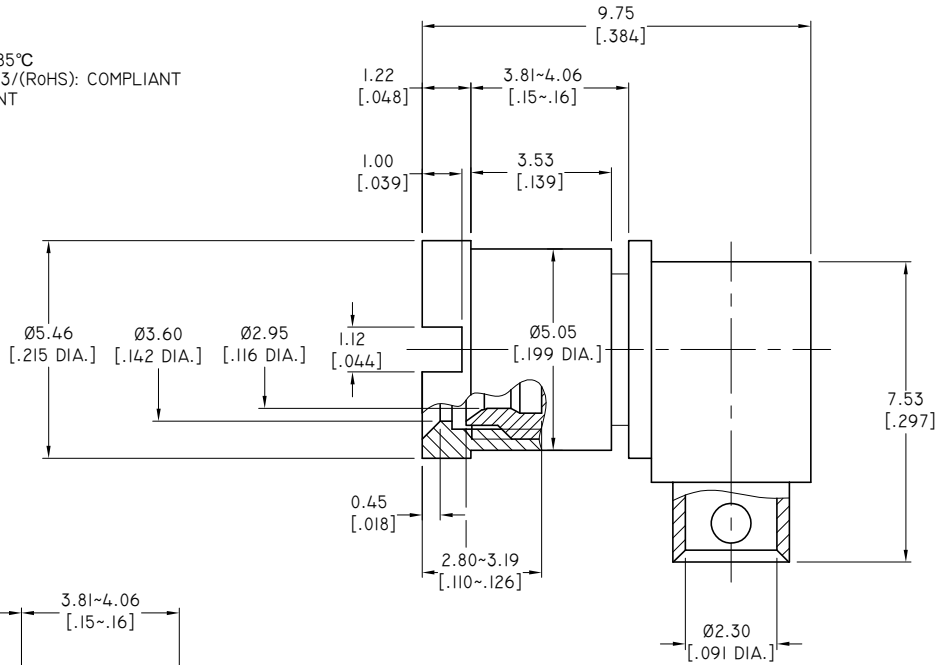

RECOMMENDED MOUNTING HOLE



CABLE STRIPPING DIMENSIONS

PART NO.	TYPE
ANO 9321-2110-1	FULL DETENT
ANO 9321-2110-2	LIMITED DETENT
ANO 9321-2110-3	SMOOTH BORE
ANO 9321-2110-4	CATCHERS MITT

DRAWN	W. YANG	DATE	09/10/19
CHECKED	L. YANG	DATE	09/10/19
APPROVED	J. QU	DATE	09/10/19



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [0.005"]
.X	±0.20 [0.008"]
X°	±0.50 [0.019"]
X*	±1°
X*	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD

TITLE			
SMP R/A MALE BULKHEAD SOLDER FOR .086 CABLE			
VIEW	PART NO.	ANO 9321-2110	
SIZE	SCALE	SHEET	REV.
A3	8:1	1/1	A