REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/19/19	J. QU

1.0 MATERIAL & FINISH
1.1 CABLE ADAPTOR: BRASS, GOLD PLATED
1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
1.3 INSULATOR: PTFE
1.4 HOUSING AND SHROUD: STAINLESS STEEL, PASSIVATED

2.0 ENVIRONMENTAL DATA:
2.1 TEMPERATURE RANGE: -55℃~+165℃
2.2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
2.3 1999/45/EC(REACH): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:
3.1 IMPEDANCE: 50 Ω
3.2 FREQUENCY RANGE: DC~65GHz
3.3 VSWR: 1.30 MAX. @ DC~40GHz

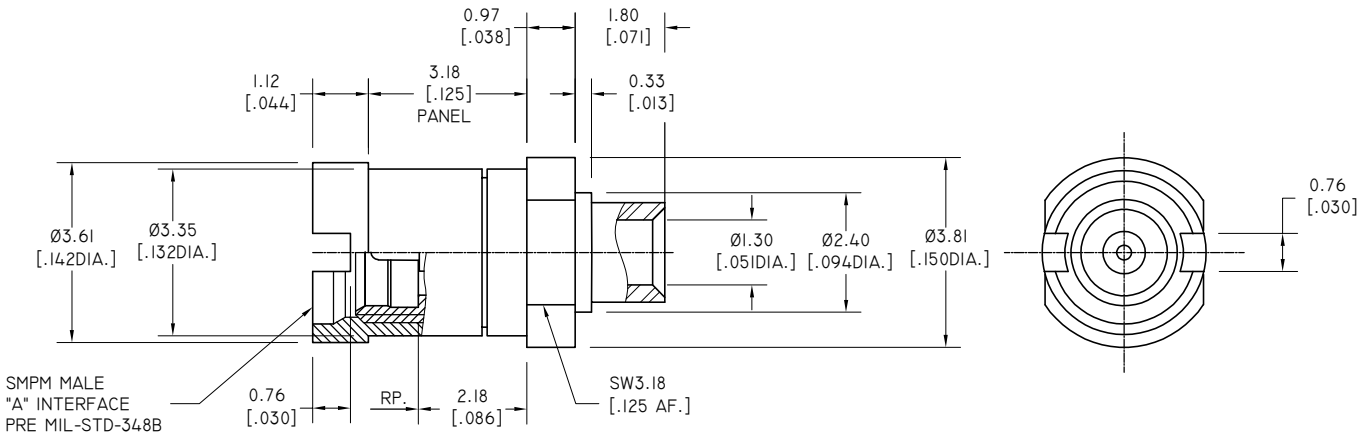



CABLE STRIPPING DIMENSIONS

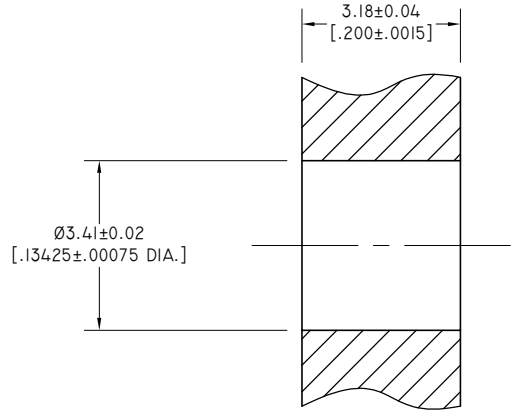

RECOMMENDED MOUNTING HOLE

PART NO.	"A" INTERFACE
ANO 9411-2049-1	FULL DETENT
ANO 9411-2049-2	SMOOTH BORE

DRAWN	W. YANG	DATE 06/19/19
CHECKED	L. YANG	DATE 06/19/19
APPROVED	J. QU	DATE 06/19/19

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD

ANOISON

TITLE
SMPM STRAIGHT MALE BULKHEAD
SOLDER FOR .047 CABLE

VIEW

PART NO.
ANO 9411-2049

SIZE	SCALE	SHEET	REV.
A3	10:1	1/1	A