

MATERIAL & FINISH:

- 1 HOUSING AND SHROUD: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.30 MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+165 °C
- 2 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC (REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/22	J QU

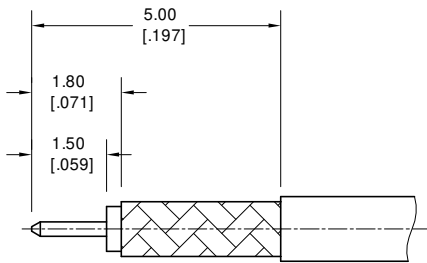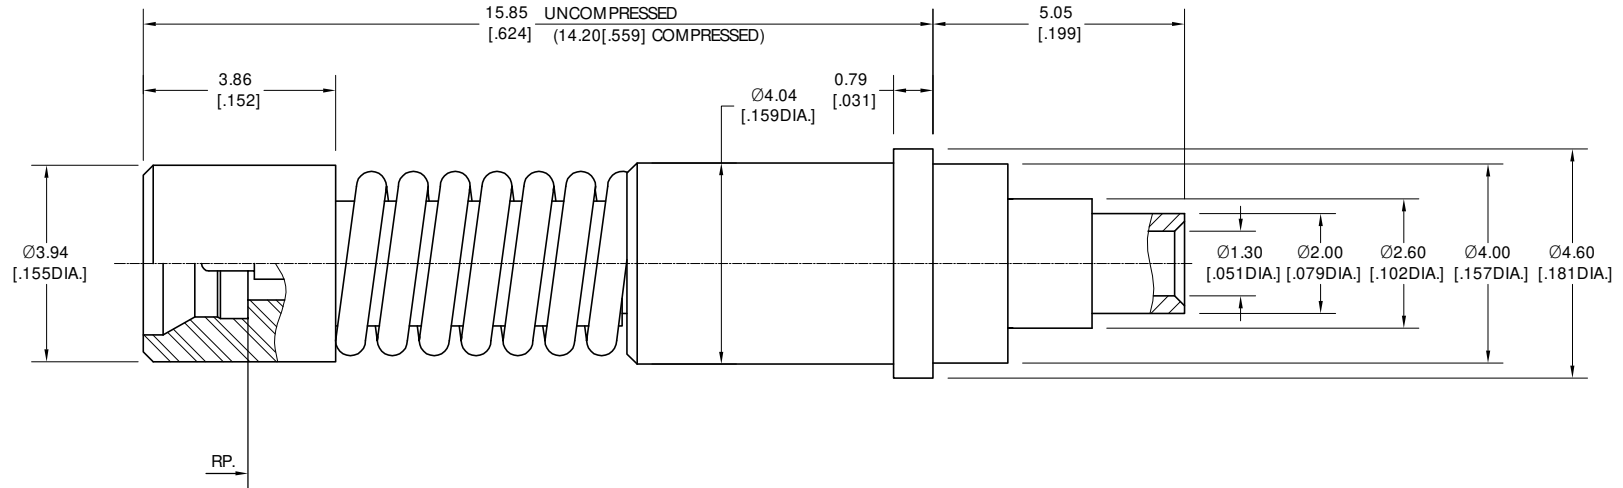

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	05/10/22
CHECKED	X. B. YANG	DATE	05/10/22
APPROVED	J QU	DATE	05/10/22

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
 COPYRIGHT © 2022 ANOISON ELECTRONICS LTD



TITLE
**SMPM MALE SMOOTH BORE INTERFACE FIT M38999
 SIZE 12 INSERT SOLDER FOR .047 CABLE**

VIEW		PART NO. ANO 9411-2060	SIZE A3	SCALE 10:1	SHEET 1/1	REV. A
------	--	---------------------------	------------	---------------	--------------	-----------