MATERIAL & FINISH:
1 BODY: STAINLESS STEEL, GOLD PLATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: PTFE

ELECTRICAL DATA:
1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~40 GHz
3 VSWR: 1.30 MAX.

ENVIRONMENTAL DATA:
1 TEMPERATURE RANGE: -55℃~+125℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1907/2006/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/20/21	J. QU

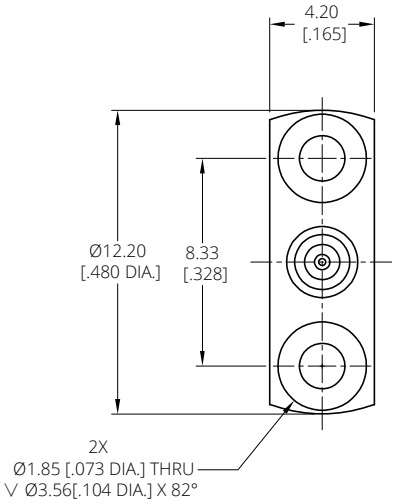

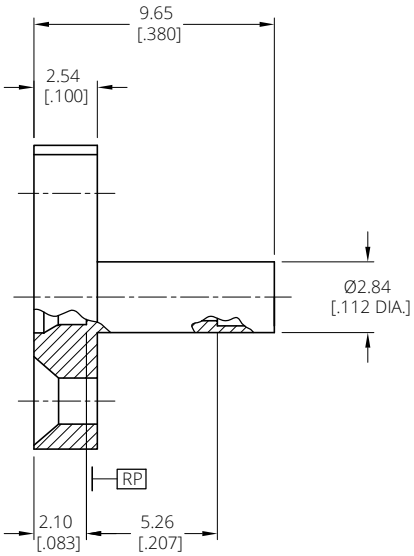

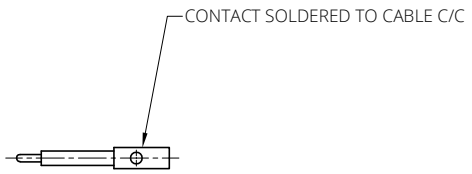

DRAWN	XB. YANG	DATE	12/20/21
CHECKED	W. YANG	DATE	12/20/21
APPROVED	J. QU	DATE	12/20/21

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD

ANOISON

TITLE
SMPM MALE SMOOTH BORE
2 HOLE FLANGE MOUNT FOR .086 CABLE

VIEW

PART NO.
ANO 9411-3057

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A