MATERIAL & FINISH:

1 BODY: BRASS, GOLD PLATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: PTFE

ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~65 GHz
3 VSWR: ≤1.50 @ DC~26.5 GHz
4 INSERTION LOSS: 0.1 X $\sqrt{F\ (GHZ)}$ dB

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -55℃~+125℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1907/2006/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/18/23	J. Q

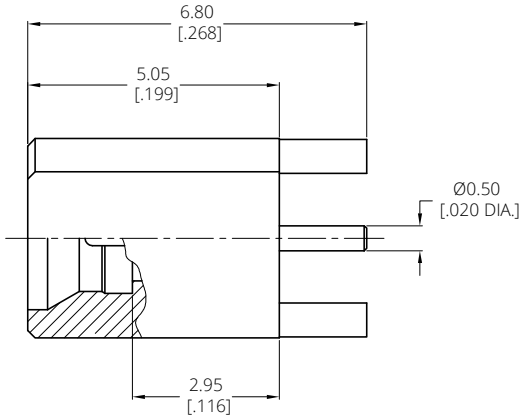

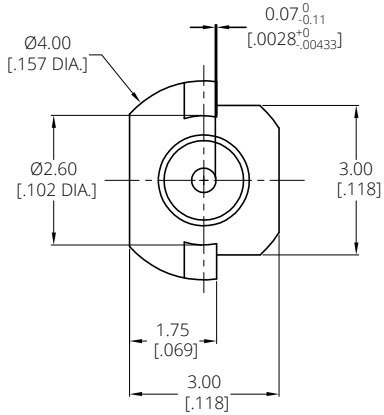

DRAWN	W. Y	DATE 05/18/23
CHECKED	X. Y	DATE 05/18/23
APPROVED	J. Q	DATE 05/18/23

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD

ANOISON

TITLE: SMPM STRAIGHT MALE RECEPTACLE SMT, FULL DETENT

VIEW

PART NO.: ANO 9411-4025

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A