

MATERIAL & FINISH:

- 1 BODY: KOVAR, GOLD PLATED
- 2 CENTER CONTACT: KOVAR, GOLD PLATED
- 3 INSULATOR: GLASS 7070



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~65 GHZ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+165°C
- 2 2011/65/EU (RoHS): COMPLIANT
- 3 HERMETICITY: 1×10^{-8} CC STD. CC/SEC. AT 1 ATMOSPHERE

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/22/16	J. QU
B	ANO 9411-5010-1 FULL DETENT ADDED ANO 9411-5010-2 SMOOTH BORE ADDED	10/28/19	J. QU

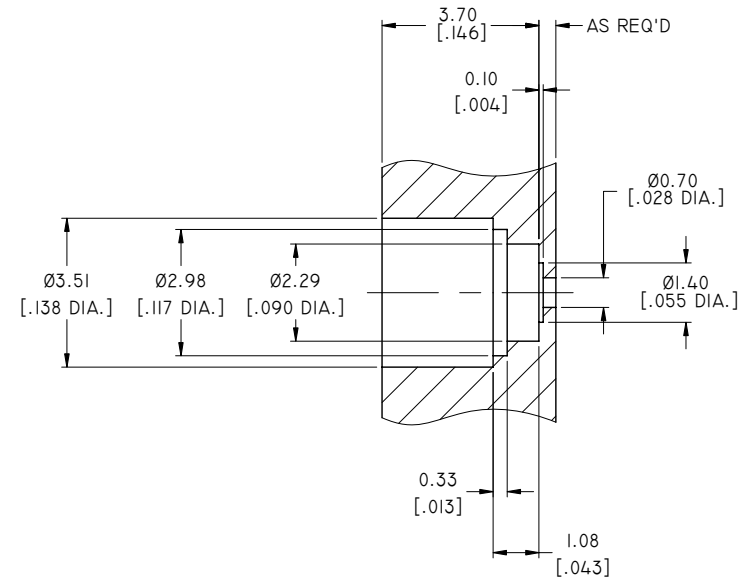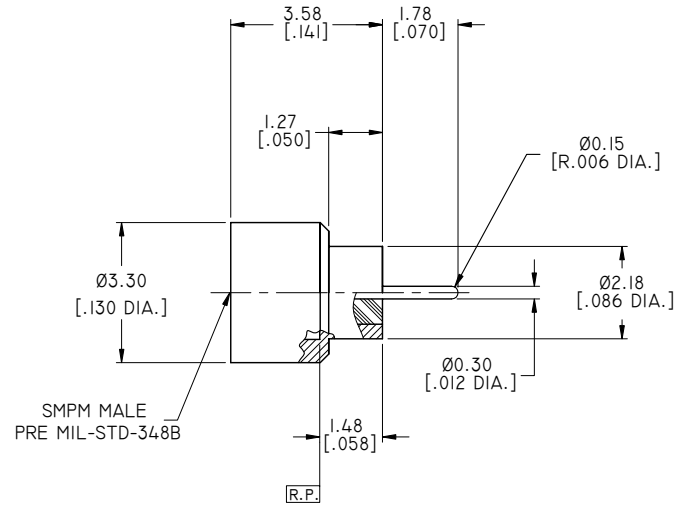

FLUSH SHROUD MOUNTING HOLE

PART NO.	TYPE	DURABILITY	FORCE TO ENGAGE	FORCE TO DISENGAGE
ANO 9411-5010-1	FULL DETENT	100 CYCLES MIN.	4.5 LBS TYP.	6.5 LBS TYP.
ANO 9411-5010-2	SMOOTH BORE	500 CYCLES MIN.	2.5 LBS TYP.	1.5 LBS TYP.

DRAWN	X. B. YANG	DATE	10/28/19
CHECKED	P. CHEN	DATE	10/28/19
APPROVED	J. QU	DATE	10/28/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE				
SMPM STRAIGHT MALE SOLDER-IN HERMETIC SHROUD WITH Ø.012 CONTACT, .070 LENGTH				
VIEW		PART NO.		
		ANO 9411-5010		
SIZE	SCALE	SHEET	REV.	
A3	8:1	I/1	B	