



4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/30/16	J. QU
B	DRAWING CHANGED	07/06/21	J. QU

MATERIAL & FINISH:
 1. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
 2. BODY: BERYLLIUM COPPER ALLOY, GOLD PLATED
 3. INSULATOR: PTFE

ENVIRONMENTAL DATA:
 1. TEMPERATURE RANGE: -65°C~+165°C
 2. 2002/95/EC (RoHS): COMPLIANT

ELECTRICAL SPECIFICATIONS:
 1. IMPEDANCE: 50 Ω
 2. FREQUENCY RANGE: DC-50GHZ
 3. VSWR: 1.35 TYPICAL AT DC-18GHZ

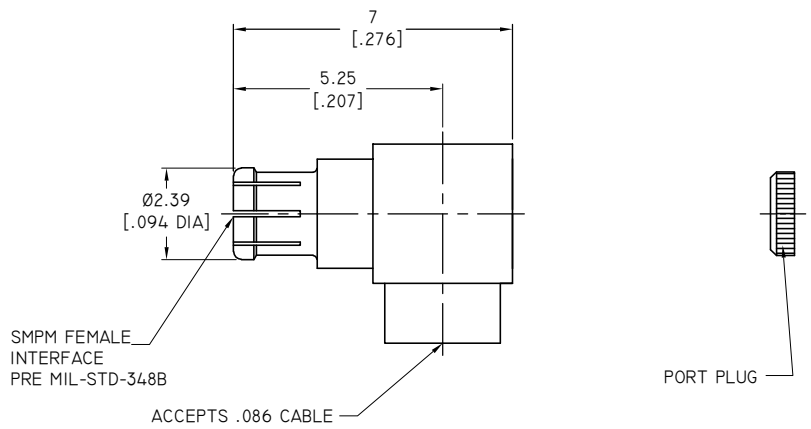

CABLE STRIPPING DIMENSIONS

DRAWN	W. YANG	DATE	07/06/21
CHECKED	L. YANG	DATE	07/06/21
APPROVED	J. QU	DATE	07/06/21
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
X°	±1°		
X*	±2°		

TITLE
SMPM R/A FEMALE SOLDER FOR .086 CABLE

VIEW

PART NO.
ANO 9422-2012

SIZE A3	SCALE 8:1	SHEET 1/1	REV. B
-------------------	---------------------	---------------------	------------------

D
C
B
A

D
C
B
A

4 3 2 1