

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, ALBALOY PLATED
- 3 COUPLING NUT: BRASS, NICKEL PLATED
- 4 CRIMP FERRULE: COPPER, NICKEL PLATED
- 5 INSULATOR: PTFE
- 6 GASKET: MVQ(SILICONE RUBBER)

ELECTRICAL DATA:




- 1 IMPEDANCE: 75 Ω
- 2 FREQUENCY RANGE: DC~1000MHZ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 IP RATING(INTERFACE MATED): IP68
- 3 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 4 1999/45/EC(REACH): COMPLIANT

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/06/13	J. QU
B	TABLE ADDED	12/07/13	J. QU
C	1. 2015/863/(RoHS): COMPLIANT ADDED 2. 1999/45/EC(REACH): COMPLIANT ADDED	09/25/18	J. QU

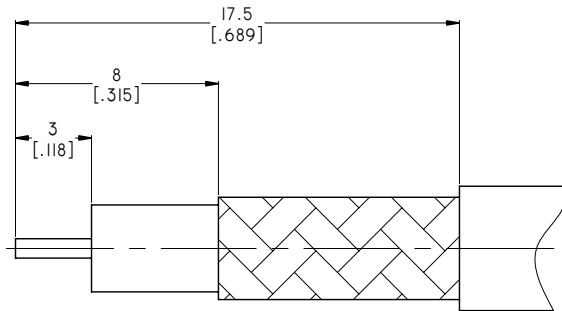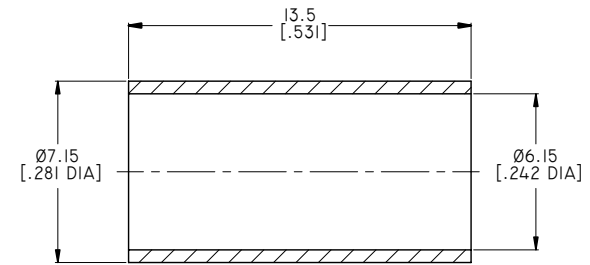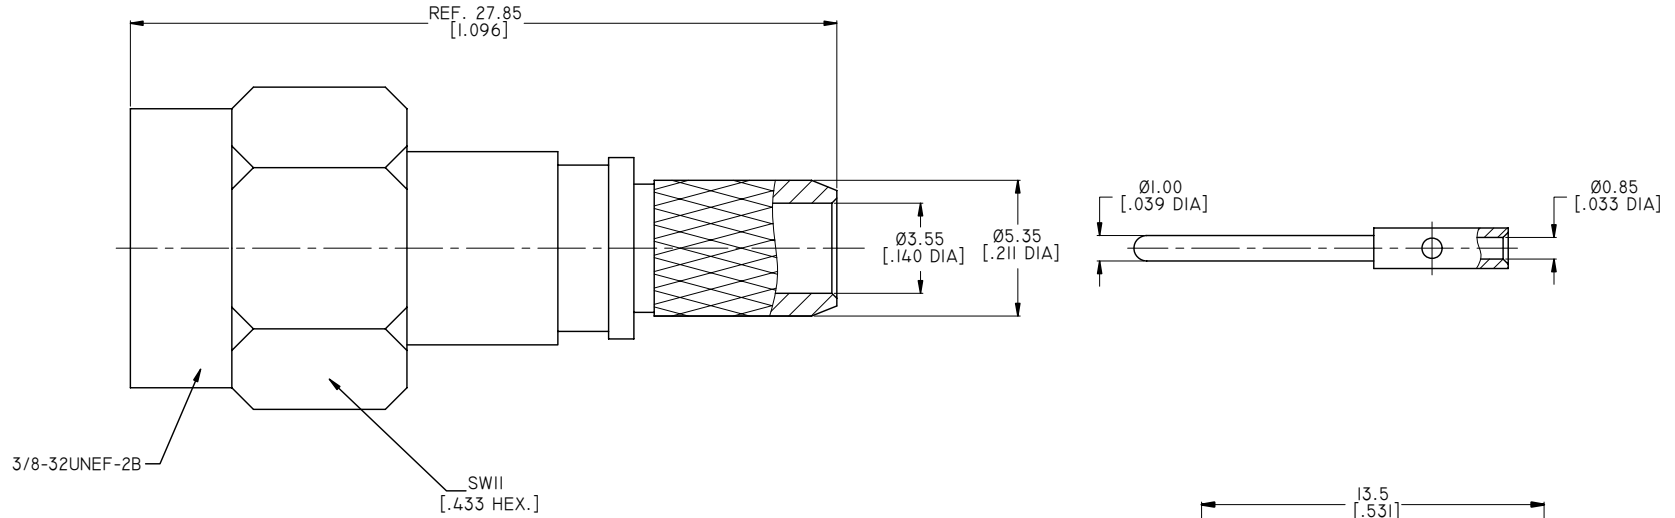

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	09/25/18
CHECKED	X. B. YANG	DATE	09/25/18
APPROVED	J. QU	DATE	09/25/18

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
X°	±1°
X"	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD



TITLE
75 OHM F MALE CRIMP/SOLDER ATTACHMENT FOR BELDEN 89259

VIEW	PART NO. ANO 9711-2013		
SIZE A3	SCALE 5:1	SHEET 1/1	REV. C