

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED 2~3 μM
- 2 CENTER CONTACT: PHOSPHOR BRONZE, NICKEL PLATED 2~3 μM
- 3 NUT: BRASS, NICKEL PLATED 2~3 μM
- 4 LOCK WASHER: PHOSPHOR BRONZE, NICKEL PLATED 2~3 μM
- 5 INSULATOR: PTFE

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EC (RoHS): COMPLIANT


ELECTRICAL DATA:

- 1 IMPEDANCE: 75 Ω
- 2 FREQUENCY RANGE: DC~2150 MHZ
- 3 INSERTION LOSS: 0.20 DB TYP.
0.30 DB MAX.
- 4 VSWR: 1.22 MAX.


APPLICABLE STANDARDS:

- 1 INTERFACE ACCORDING TO: IEC61169-24

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/21/17	J. QU
B	1. FREQUENCY RANGE CHANGED TO DC~2150 MHZ 2. INSERTION LOSS CHANGED TO 0.20-0.30 DB 3. VSWR CHANGED TO 1.22 MAX.	05/24/17	J. QU

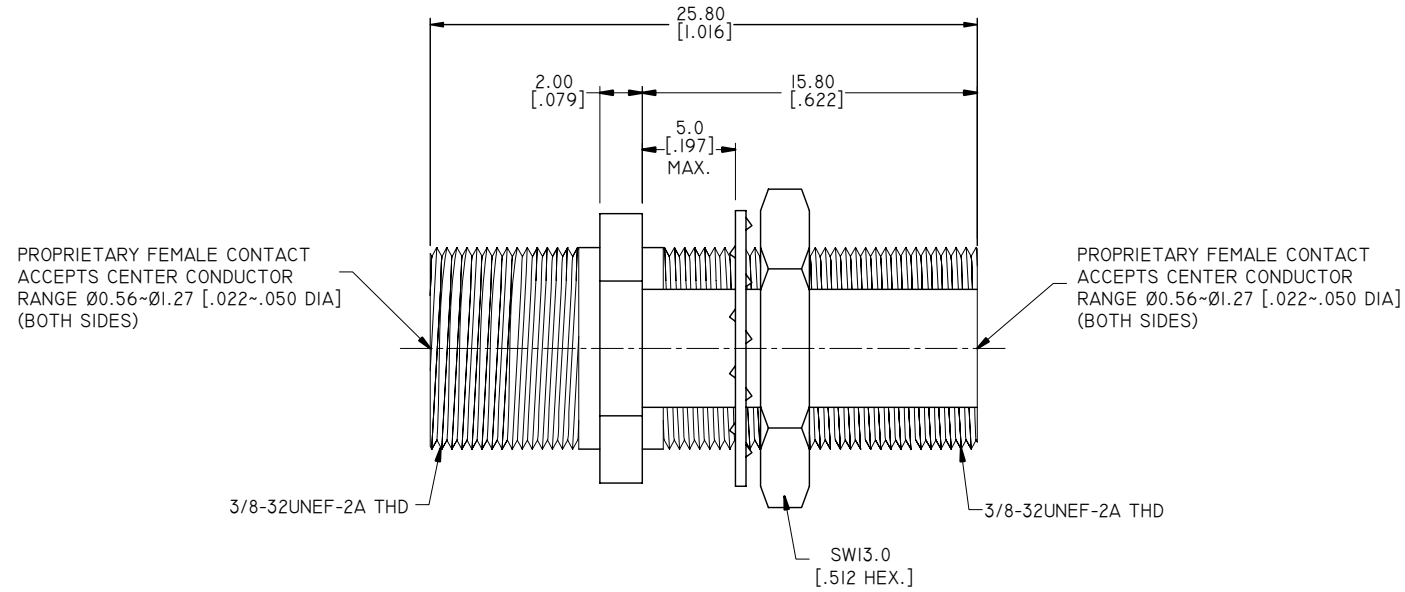


DRAWN	X. B. YANG	DATE	05/24/17
CHECKED	L. YANG	DATE	05/24/17
APPROVED	J. QU	DATE	05/24/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



ANOISON
...we create connection for technologies

TITLE
ADAPTER, F FEMALE TO F FEMALE BULKHEAD

VIEW 

PART NO.
ANO 972-972-1403

SIZE A3	SCALE 4:1	SHEET 1/1	REV. B
-------------------	---------------------	---------------------	------------------

D

C

B

A

D

C

B

A

4

3

2

1

4

3

2

1